5.08MM 间距
(.200" PITCH) (5082系列)

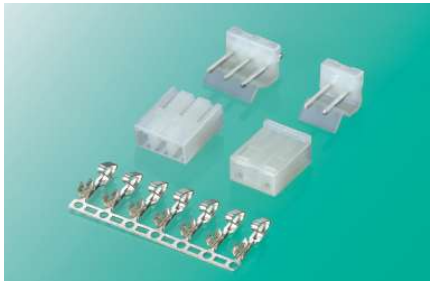

主要技术参数 (Main specifications)

- 使用导线范围 (Wire range):AWG#18-#24 φ=1.7-2.8mm
- 线数 (Lines):2-13P
- 额定电压 (Rated voltage):250V.AC
- 额定电流 (Rated current):5A
- 绝缘电阻 (Insulation resistance): ≥ 1000MΩ
- 耐压 (Withstanding voltage):1500V.AC
- 温度范围 (Temp range for usage):-25-120°C
- 适应基板厚度 (P.C board thickness):1.6mm

端子(Terminal)

- TP3962M-3(4018)



塑体(Housing)

- HP5082M-Y(5058)



- HP5050G-5Y



针座(Wafer)

- HW5082M-QA(5058)



A=B-5.08mm B=线数(Lines) × 5.08mm

- HW5082M-A(5058)



A=B-5.08mm B=线数(Lines) × 5.08mm

- HS5050G-1Y



SGS RoHS REACH SVHC

(5.8MM间距)
(.2283"PITCH) (SCS空调冰箱插件系列)

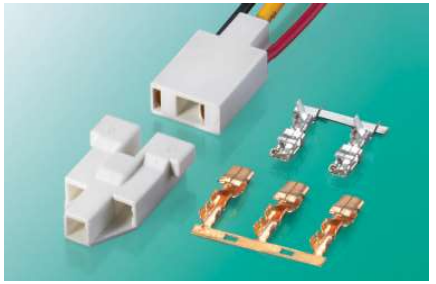

主要技术参数 (Main specifications)

- 线数 (Poles):3
- 适用线规 (Applicable wires): AWG20#-16#
- 温度范围 (Temperature range):-25°C~105°C
- 额定电压 (Voltage rating):250V.Ac/Dc
- 额定电流 (Current rating):20A
- 接触电阻 (Contact resistance): ≤ 0.01Ω
- 绝缘电阻 (Insulation resistance): ≥ 1000MΩ
- 耐压 (Withsand voltage):2000V.Ac/1min
- 材料(Material0):
  壳体(Housing):PBT UL94V-0
  尼龙Nylon UL94V-2
  端子(Terminal):磷青铜(Phos.bronze Tin/plated)

- TP5801J-3



- TR5801J-3



塑体(Housing)

- HP5801J-3Y



端子(Terminal)

型号 (Type)	适用线规 (Applicable wires)		电线外径 O.D of wire ins
	mm²	AWG#	mm
TP5801J-3	0.5-1.5	20-16	1.9-3.4
TR5801J-3	0.5-1.5	20-16	1.9-3.4

插座(Socket)

- HR5801J-3Y



- HF5801J-3Y



SGS RoHS REACH SVHC