


DSP511 NEW

Digital Signage Player with 11th Gen Intel® Core™ i5/i3 & Celeron® Processor, 4 HDMI, 4 USB and 2.5G LAN


Features

- 11th gen Intel® Core™ i5/i3 & Celeron® processor (Tiger Lake)
- 2 DDR4-3200 SO-DIMM for up to 64GB
- 4 HDMI 2.0 w/4K supported
- 4 USB, 1 2.5G LAN and 1 GbE LAN
- 1 M.2 E-Key (2230) for Wi-Fi/BT
- 1 M.2 B-Key (3052) for 5G/4G LTE
- 1 M.2 M-Key (2280) for storage

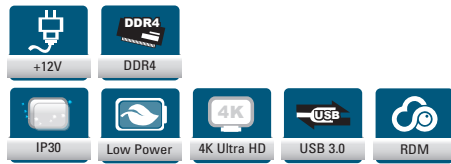

Specifications

| | |
|-----------------------|---|
| CPU | 11th gen Intel® Core™ i5/i3 & Celeron® processor (Tiger Lake) |
| System Memory | 2 x DDR4-3200 SO-DIMM, max. up to 64GB |
| Chipset | N/A |
| Storage | 1x M.2 Key M 2280 (SATA & NVMe) |
| TPM | TPM 2.0 |
| WatchDog Timer | 255 levels, 1 to 255 sec./min. |
| System I/O Outlet | 3 x USB 3.2 Gen 2 1 x USB 2.0 1 x 2.5G LAN 1 x GbE LAN 1 x Device management 4 x HDMI 2.0 1 x Audio jack (combo) 1 x RS-232 1 x DC power input (lockable) 1 x HDD LED 1 x Power switch 1 x Reset switch 6 x Antenna opening |
| Expansion Interface | 1 x M.2 Key E for Wi-Fi/BT option 1 x M.2 Key B for 5G/4G LTE option 1 x SIM card slot |
| Battery Lithium | Lithium 3 V/220 mAh |
| Power Input | +12V DC-in |
| Dimension | 260 mm (10.24") (W) x 160 mm (6.3") (D) x 26 mm (0.99") (H) |
| Weight (net/gross) | 1.3kg (2.86 lb)/2.07kg (4.6 lb) |
| Certificate | CE, FCC class A |
| Operating Temperature | 0°C to +50°C (+32°F to +122°F) |
| Operation Humidity | 10% - 90% relative humidity, non-condensing |
| EOS support | Win 10 IoT, Linux |
| Software Support | RDM |

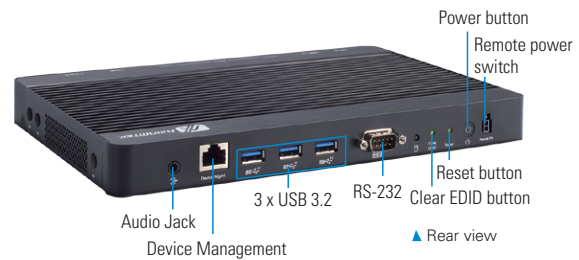

Packing List


- 1 x Power adapter

Ordering Information

Standard

| | |
|--------|--|
| DSP511 | Digital signage player with 11th gen Intel® Core™ i5/i3 & Celeron® processor, 4 HDMI, 2.5G LAN and USB 3.2 |
|--------|--|

Dimensions

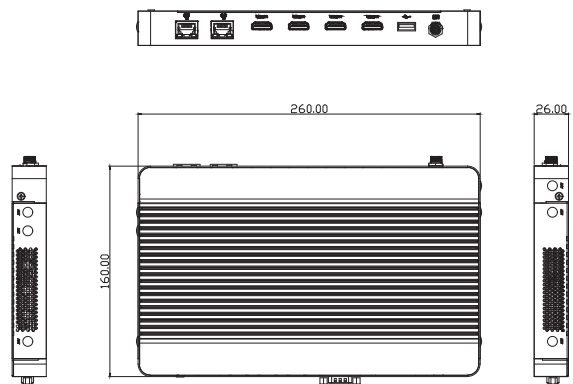

比例 1.000

