

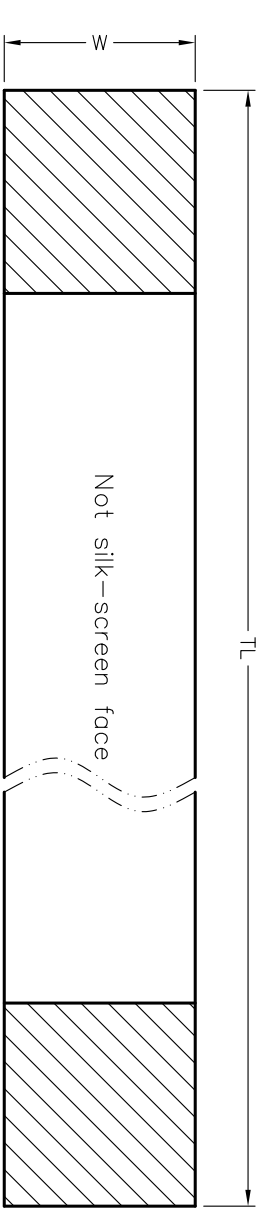
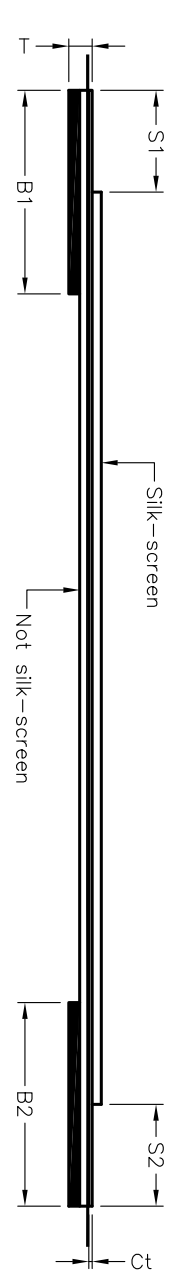


A B C D E

BOM			
No.	Item	Specification	Remarks
1	Insulation film	JINDA UL20624 White PET(43 μ m)	flame retardant rating VW-1
2	Reinforcement plate	Blue PET(225 μ m)	
3	Conductors (Flat copper wire)	Thickness 0.035mm Width 0.30mm Plating Sn	± 0.005 ± 0.03 $\geq 1\mu$ m
4	Number of Conductors	N	14

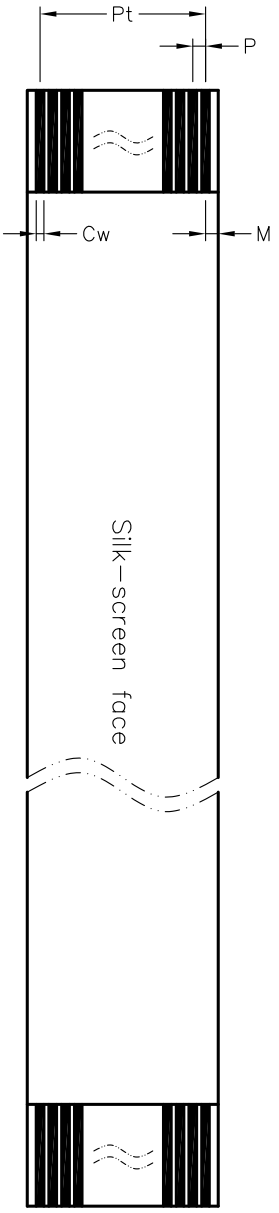

Dimensions (Unit: mm)			
1	Total length	TL	50 ± 2
2	Total width	W	7.50 ± 0.1
3	Margin width	M	0.5 ± 0.1
4	Pitch	P	0.5 ± 0.08
5	Span	Pt	6.50 ± 0.1
6	Thickness of connection area	T	0.3 ± 0.05
7	Strip length	S1	4 ± 1.0
		S2	4 ± 1.0
8	Reinforcement length	B1	8 ± 1.0
		B2	8 ± 1.0

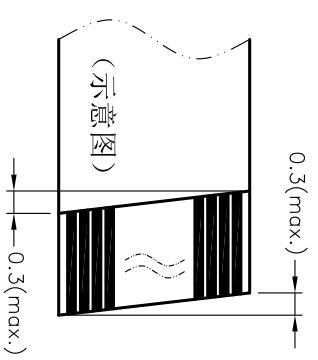

JINDA
Dongguan Jinda Electronics Co., Ltd
东莞市津达电子有限公司

GENERAL TOLERANCE	
XX: ± 0.40	
X: ± 0.30	
.X: ± 0.25	X: $\pm 2^\circ$
.XX: ± 0.15	.X: $\pm 1^\circ$

SCALE: 3.5:1	DRAWN: Luoshengrong	DATE: 2024.4.20
UNIT: mm	CHECK:	DATE:
SIZE: A4	APPROVE: Xiaozhi Jun	DATE: 2024.4.20

DOCUMENT NO: JD-Y-EF001	TITLE: 工程图	REV. A
PARTS NO: A0.5x14x50-4488b1T		SHEET: 1/1

A B C D E