



5.08



14.45 ± 0.2
3.3 ± 0.2
3.08
5.08

Specifications:
 Contact Resistance: 30mΩ max. at DC 100 mA
 Insulator Resistance: 1000MΩ min. at DC 500V
 Current Rating: 3AMP

Dielectric Withstanding Voltage: AC 1000V For 1 minute
 Operating Temperature: -55°C ~ +105°C
 Contact: Phosphor bronze
 Housing: PBT & 30% Glass Fiber (UL 94V-0)

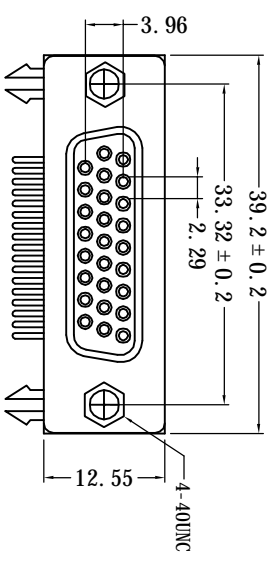

39.2 ± 0.2
 33.32 ± 0.2
 2.29
 3.96
 12.55
 4.40DNC

- 要求:
1. 塑料件无裂痕。
 2. 整排端子成一直线，相邻端子之间相互平行。

序号/Rev.No.	更改记录/Revision note	签名/Signature	日期/Date
------------	--------------------	--------------	---------

设计/Designed by	绘图/Draw ing by	审核/Checked by	批准/Approved by	未注公差 General Tolerance
				X: ±0.2 X: ±2° .X ±0.1 .X' ±1° .XX ±0.05 .XX' ±0.5° .xxx ±0.01
图名/Title		文件编号/File No.		
108-26S				
备注/Remark		页序/Sheet		单位/Units: mm
XI NVA ELECTRONIC CO., LTD				