


◆ SPECIFICATION

DESCRIPTION	UL20861 - 40N × 230mm * 0,5p * (4/4 , 8/8) * (0,05*0,32) * P7
-------------	---

► CABLE TYPE (PATTERN : 7)

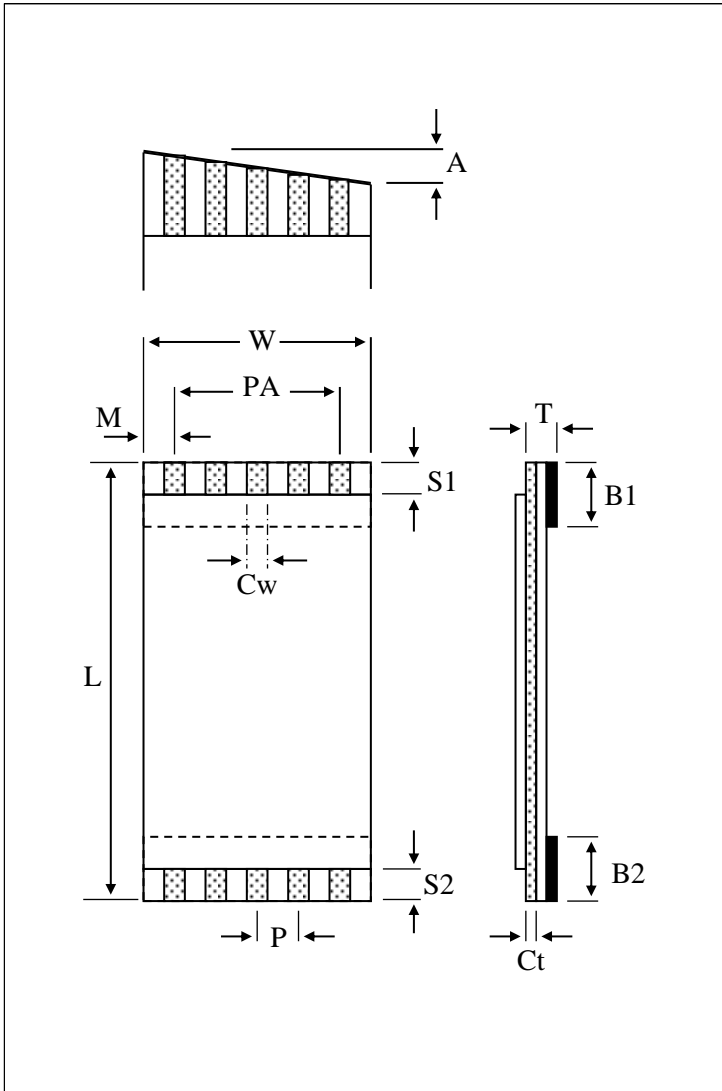

► CABLE DIMENSION [unit : mm]

DESCRIPTION	Abbr	Dimension	Tolerance
PITCH	P	0,5	± 0.050
NO. OF CONDUCTOR	N	40	-
CABLE LENGTH	L	230	± 3.00
STRIP LENGTH	S1	4	± 1.0
	S2	4	± 1.0
S/T LENGTH	B1	8	± 2.0
	B2	8	± 2.0
INSERT THICK	T	0,3	± 0.05
WIDTH	W	20,50	± 0.10
SPAN	PA	19,50	± 0.10
MARGIN	M	0,50	± 0.10
CONDUCTOR THICK	Ct	0,05	± 0.01
CONDUCTOR WIDTH	Cw	0,32	± 0.03
LESS THAN	A	0,5	-
PLATED	PL	$1\mu m \uparrow$	

◎ REMARK

Data input

STYLE	N	TL	P	S1	S2	B1	B2	Ct	Cw	pattern
UL20861	40	230	0,50	4	4	8	8	0,05	0,32	7