REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD

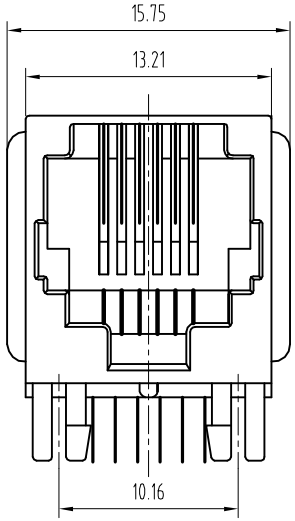

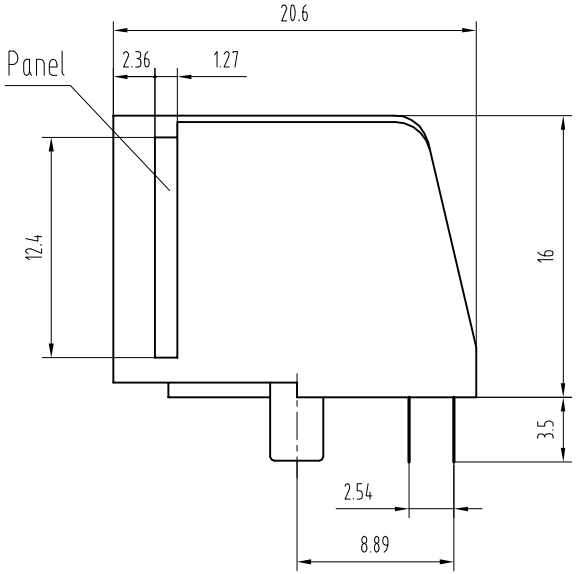

NOTES:

ELECTRICAL:

1.VOLTAGE RATING	:125 VAC RMS.
2.CURRENT RATING	:1.5 AMP.
3.CONTACT RESISTANCE	:30 MILLIOHMS MAX.
4.INSULATION RESISTANCE	:500 MEGOHMS MIN @ 500V DC .
5.DIELECTRIC STRENGTH	:1000V AC RMS 50Hz. 1MIN.

MECHANICAL:

1.HOUSING MATERIAL	:GLASS FILLED POLYESTER UL94V-0.
2.CONTACT MATERIAL	:PHOSPHOR BRONZE Φ0.46mm.
3.PLATING	:GOLD PLATING OVER NICKEL.
4.OPERATING	:750 CYCLES MIN.
5.PCB RETENTION PRE-SOLDER	:1 LB MIN.

ENVIRONMENTAL:

1.Temperature Range : -40℃~+85℃

2.Relative Humidity : 90~95% (40±2℃)

PART NUMBER:

DY9757 - XX XX X X X - X X X

Part Nomber

Point NO.	Contact NO.	Plastic Peg	Panel	Gold Pin	Gold Thickness	Plastic	Lo Go
04-4 Point 06-6 Point 08-8 Point	02-2 Contact 04-4 Contact 06-6 Contact 08-8 Contact	1-Split Peg 2-L Peg	0-No Panel 1-With Panel	1-Φ0.46mm Round Pin 2-0.35mm Flat Pin	1-Fu" 2-3u" 3-6u" 4-15u" 5-30u" 6-50u"	1-Nylon 66 2-Nylon 46 3-PBT	1-W "ZQP" 2-W/O "ZQP"

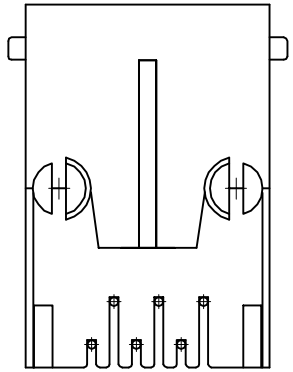

PCB LAYOUT

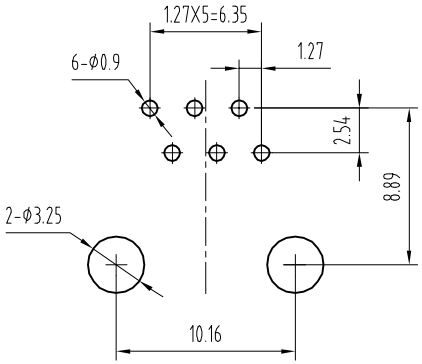

DETACHED LISTS	mm (inch)	DFTO: ChenFeifei	DATE: 2006.05.16	DUOYUAN TELECOM PRODUCTS CO.,LTD
		CHKD:	DATE:	
	Tolerance Exept as Noted	MFO:	DATE:	
	mm 0±0.2 ± 00±0.15 ± 000±0.075 ±	APPVL:	DATE:	DY9757-0606112-232
		MATERIAL:		
	ANGLES ± 0.5	Q`TY:	DRAWING NO.	SIZE A4 / REV 06/05/02 0
		FINISH:	/PART NO.	
		SCALE: 2.5:1	DO NOT SCALE DRAWING	SHEET OF

PDF 文件使用 "pdfFactory Pro" 试用版本创建 www.fineprint.com.cn