


DSB-300

IP40 Dust-proof Digital Signage Player

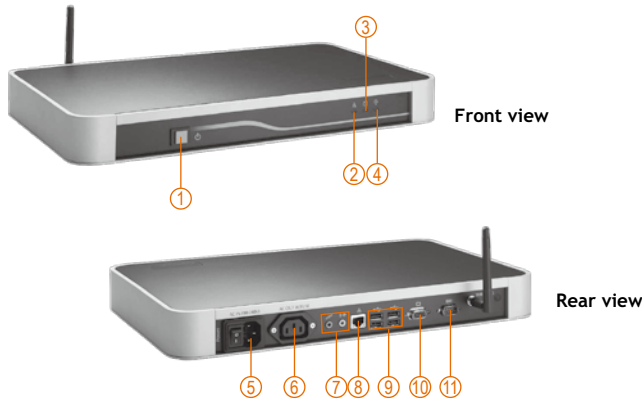

- | | |
|-----------------|----------------------------|
| 1. Power switch | 7. Audio (Line-out/Mic-in) |
| 2. Ethernet LED | 8. Ethernet |
| 3. HDD LED | 9. USB 2.0 x 4 |
| 4. Power LED | 10. VGA |
| 5. AC inlet | 11. COM (RS-232) |
| 6. AC outlet | |

Specifications

Standard Color	Black
Construction	Aluminum
CPU	Intel® Atom™ processor D525 1.8 GHz
Chipset	Intel® ICH8M
System Memory	2 x 204-pin DDR3 SO-DIMM max. up to 4 GB
Storage	2.5" SATA HDD
BIOS	AMI
System I/O Outlet	4 X USB 2.0 1 X 10/100/1000Mbps Ethernet 1 X VGA 1 x RS-232 1 x Audio (Mic-in/Line-out)
Expansion Slot	2 x PCI Express Mini Card (for optional 3G and wireless module)
Power Supply	65W, 100 - 240VAc
Operating Temperature	0° C - +40° C (32° F - 104° F)
Weight (net/gross)	3.8 kg (8.37 lb)/4.6 kg (10.14 lb)
Certification	CE
Dimensions	400 mm (15.74") (W) x 44 mm (1.73") (D) x 235 mm (9.25") (H)

Features



- Dust-proof design (full enclosure: IP40)
- Fanless operation
- Low power consumption: Intel® Atom™ processor D525 1.8 GHz
- Hardware decoder for full HD monitor
- Optional 3G and wireless module
- Supplies power to LCD
- Supports wall mount

Ordering Information


DSB-300 Fanless digital signage player

* Specification and certifications are based on options and may vary.

Optional Accessories

- 3G module and antenna
- Wireless LAN kit
- AC output cable

Dimensions

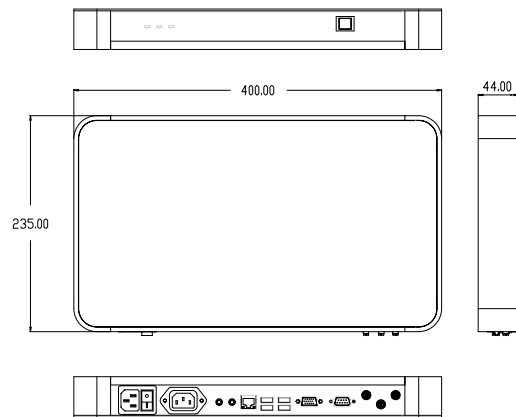

Overview

Digital Signage Solutions

Healthcare & Medical Solutions
Medical Panel Computers

Healthcare & Medical Solutions
Medical Grade Monitors

Fanless & Heavy-duty Touch Panel Computers

Touch Panel Computers for Infotainment

Industrial Touch Panel Computers & Monitors
Industrial Touch Panel Computers

Industrial Touch Panel Computers & Monitors
Industrial Touch Panel Monitors

Open Frame Panel Computers

Accessories