


# 9001 Series

## DIN41612 Mixed Style H7/F24 Female

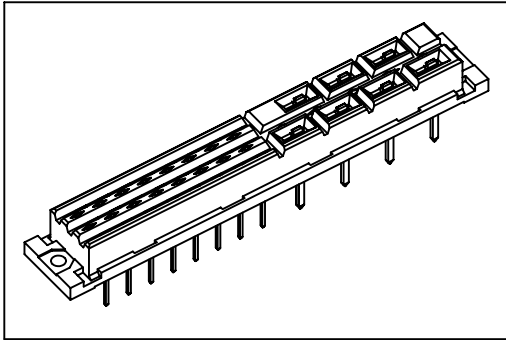

### Material:

Housing: 30% Glass filled PBT UL94V-0.

Contacts: Phosphor Bronze.

### Electrical Characteristics:

Current Rating: 5.6 AMP.

Dielectric Withstanding Voltage: AC 1000V For 1 minute.

Insulator Resistance: 1000MΩmin. at DC 500V.


Contact Resistance: 30mΩmax. at DC 100mA.

Operating Temperature: -55°C ~ +105°C.

### Features:

\* Power connectors.

\* Mates with 9001-65311C.

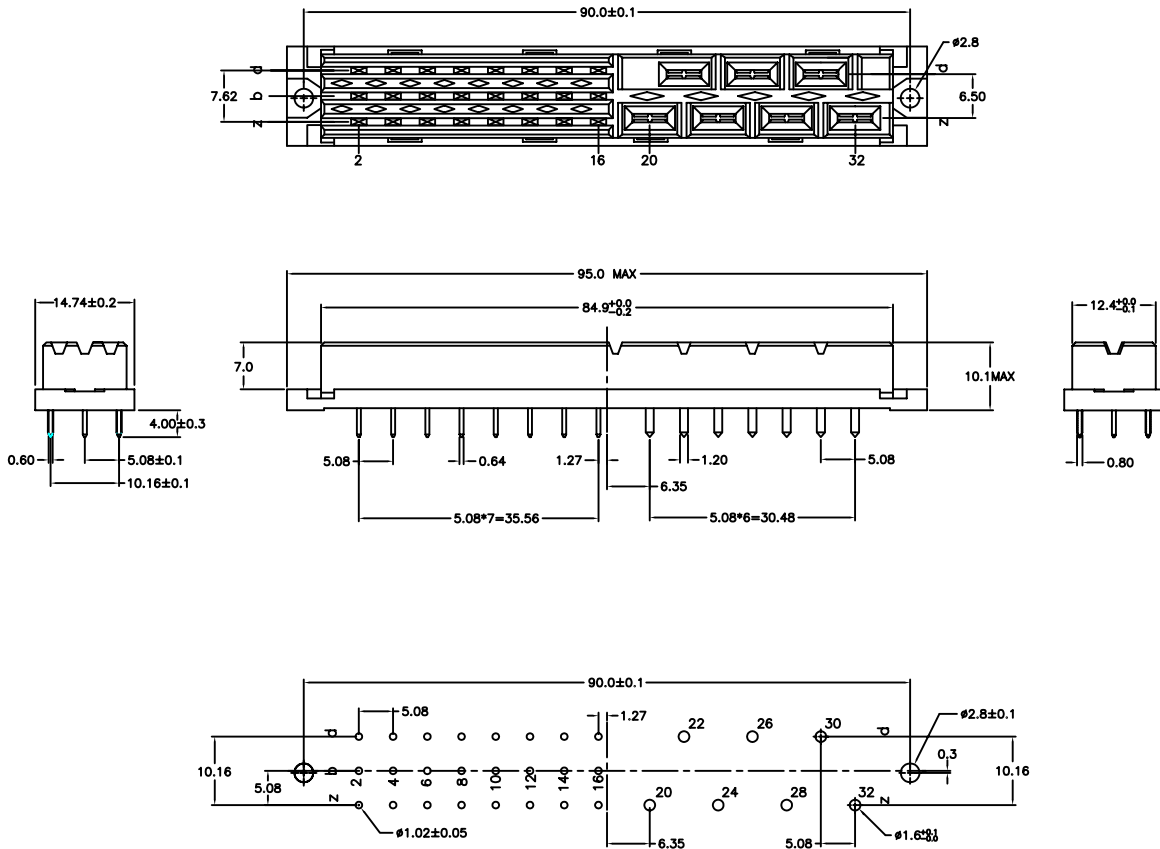

P.C. Board Layout

## Ordering information

9001- 66	31	1	C	00	L1	A
Series	6:Female	Position	1:Dip	Length	C: z20~z32 TIN/NI Plating	Other With Selective Gold Plated
					A: z20~z32 AG/NI Plating	Other With Selective Gold Plated
					00: G/F	10: 10u"
					15: 15u"	30: 30u"
					Blank: W/O Lock	A: Tray
					L1: With Lock	Package
					See Page CA04	