

VECO VANSONIC ENTERPRISE CO., LTD.


8F.,No.7,Lane 16, Sec.2, Szechwan Road, Panchiao, Taipei Hsien, TAIWAN.

TEL: +886-2-29626335

TEL: +886-2-29625220

E-MAIL: vansonic@ms4.hinet.net


1.	MODEL:	43CS08B2 -M75NA(Shining Mylar)			
2.	Dimension	Outer Diameter	43x40 mm.	Baffle Opening	33 mm.
		Height	Refer to Drawing .	Weight	7.8 Grams.
3.	Magnet	Materials	Rare Earth .	Size	ϕ 12.5 X 1.5 mm.
4.	Nominal Impedance	8 Ohm	\pm 15 %	At	1200 Hz.
5.	Power Rating	Normal	200 mW.	Maximum	400 mW.
6.	Lowest Resonant Frequency	550	\pm 20 %		Hz.
7.	Output Sound Pressure Level (S.P.L.)	78	\pm 3 db /	0.2 Watt	0.5 Meter.
		Average at	600, 800, 1000, 1200		Hz.
8.	Frequency Range	300 ~ 7500	Hz.	Average SPL	- 10 db.
9.	Distortion	5 %	Maximum At	1000 Hz.	200 mW.
10.	Abnormal Sound Test	Must Be Normal Test By 1.3 Volts. Sine Wave.			
11.	Load Test	White Noise With Weighted Filter 1.3 Volts.(RMS) 24 Hrs.			
12.	Polarity	Diaphragm shall move Forward when Apply a Positive DC.			
		Current to the "+" or "Marked" Terminal.			

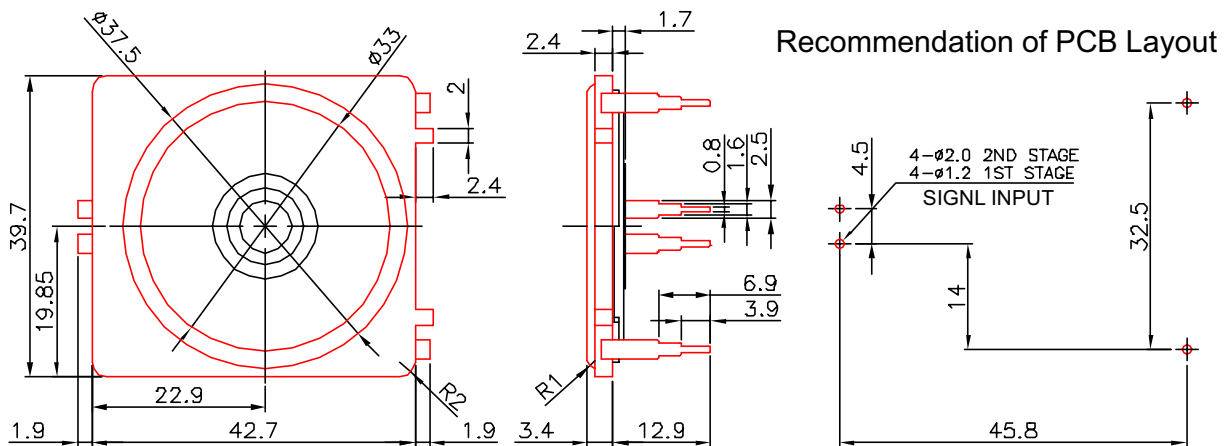

Unit : mm

Housing Material : PBT

43CS08B2-M75NA VOL:1.265V(0.2W) DIS:0.5M VANSONIC
X:1.0000kHz *Y:75.41dB ZA:1.0000 SSR Fund.

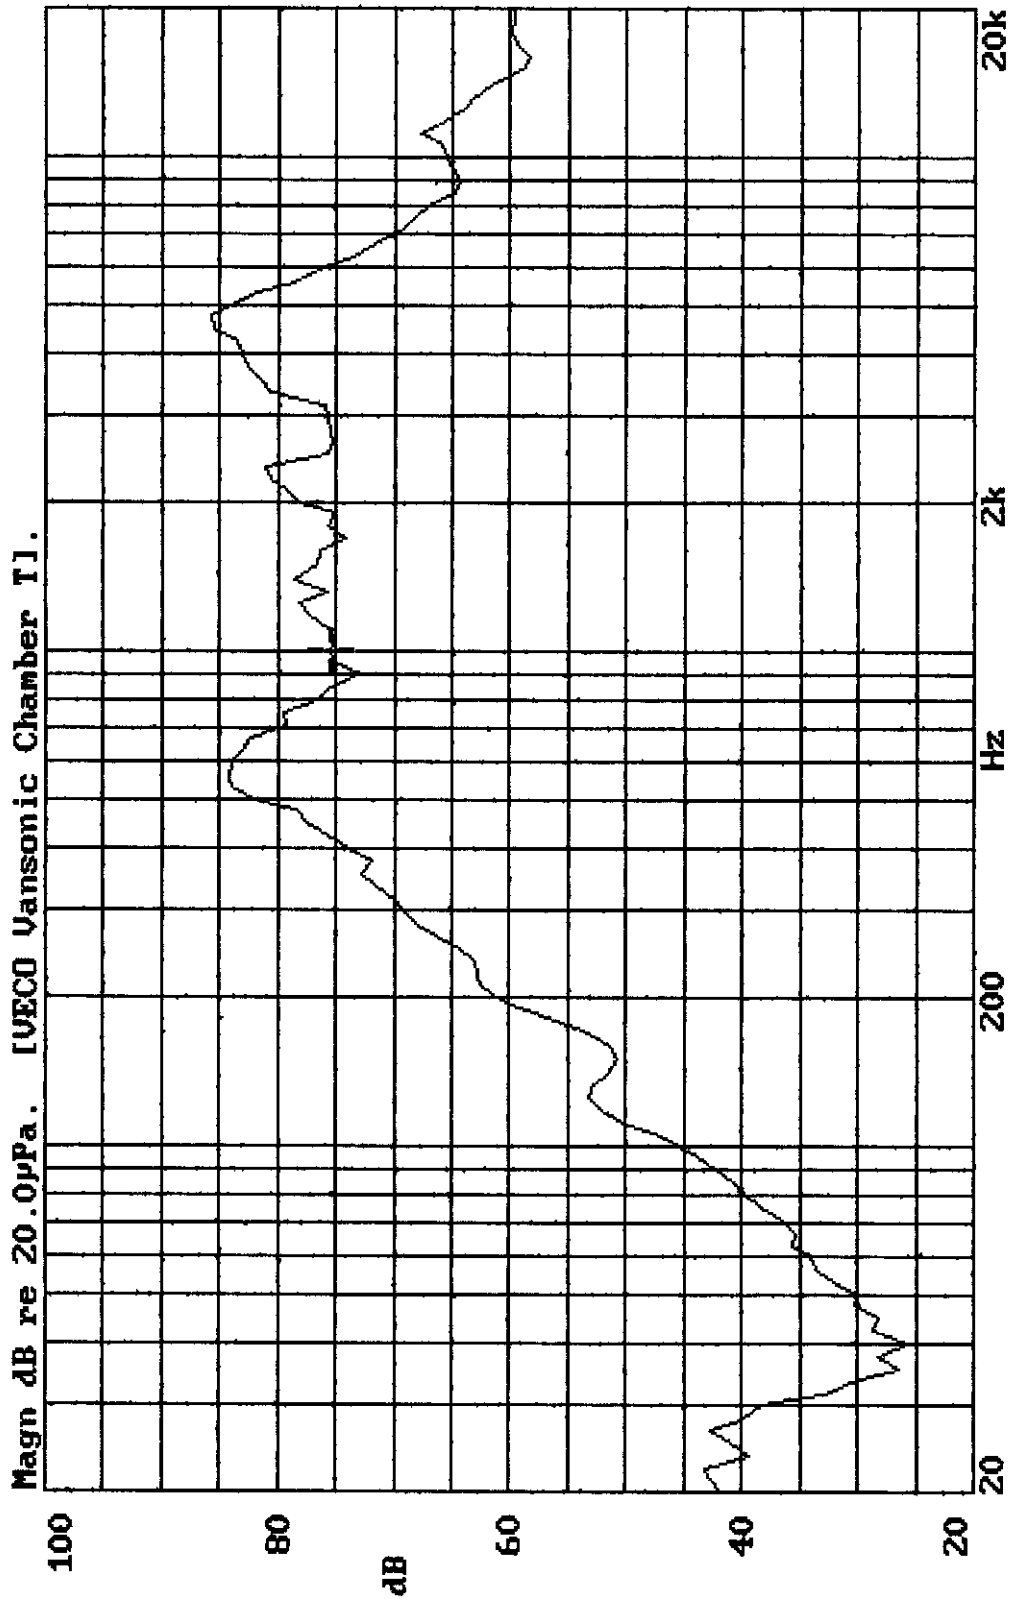

21-MAR-2000 15:21:56

Mode: SSR

