
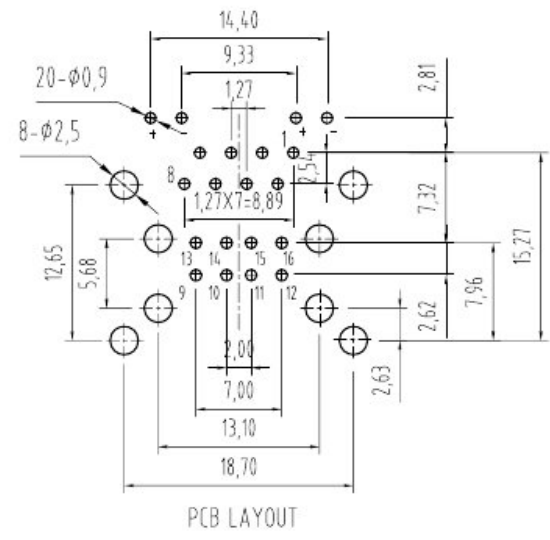
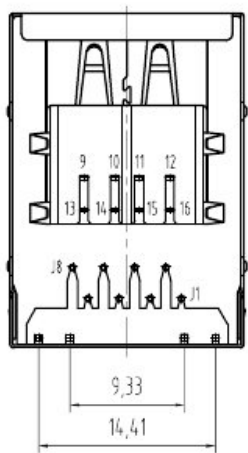


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	CHKD

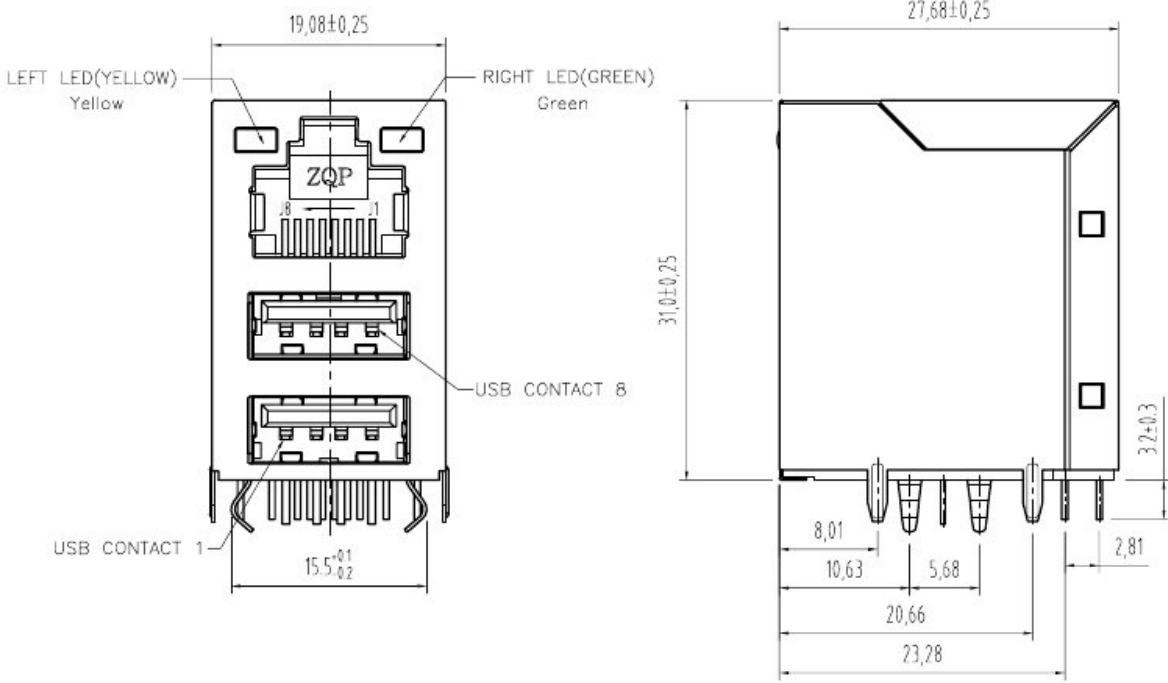

NOTES:
ELECTRICAL:

1. Voltage Rating: 125V AC Max.
2. Current Rating: 1.5 Amp Max @25°C.
3. Contact Resistance: 30 Milliohms Max @500V DC.
4. Insulation Resistance: 500 Megohms Min @500V DC.
5. Dielectric Withstanding Voltage: 1000V AC RMS 50Hz OR 60Hz, 1Min

MECHANICAL:

1. Housing Material: Glass Filled Polyester UL94V-0.
2. Contact Material: Phosphor Bronze R=0.46mm Round Pin.
3. Plating :Gold Plating Over Nickel.
4. Operating Life: 750 Cycles Min.
5. Shielding: 0.20mm Thickness Copper Alloy Plated With Nickel.
6. PCB Retention Pre-Solder: 1 LB Min.
7. PCB Retention Post-Solder: 10 LBS Min.

ENVIRONMENTAL:

1. Storage Temperature: -40°C TO +85°C.
2. Operating Temperature: -40°C TO +85°C.

DETACHED LISTS	← MM (INCH) →		DFTO: XNW	DATE: 07.11.15	TITLE	
	TOLERANCES EXCEPT AS NOTED		CHKD: BETTY	DATE: 07.11.15		
	MM	±	APPLV: PAUL	DATE: 07.11.15		
	±0.20	±	MATERIAL:			
	.00 ± 0.15	±	QTY:			
.000 ± 0.075	±	FINISH:		/PART NO.	SIZE A4	REV A/0
ANGLES ± 0.5°		THIRD ANGLE PROJECTION	SCALE : 1:1	DO NOT SCALE DRAWING		SHEET 1 OF 1