


## ◆ SPECIFICATION

DESCRIPTION

UL2896 - 30N × 110mm \* 0,5p \* (4/4 , 8/8) \* (0,05\*0,32) \* P7

### ► CABLE TYPE (PATTERN : 7 )

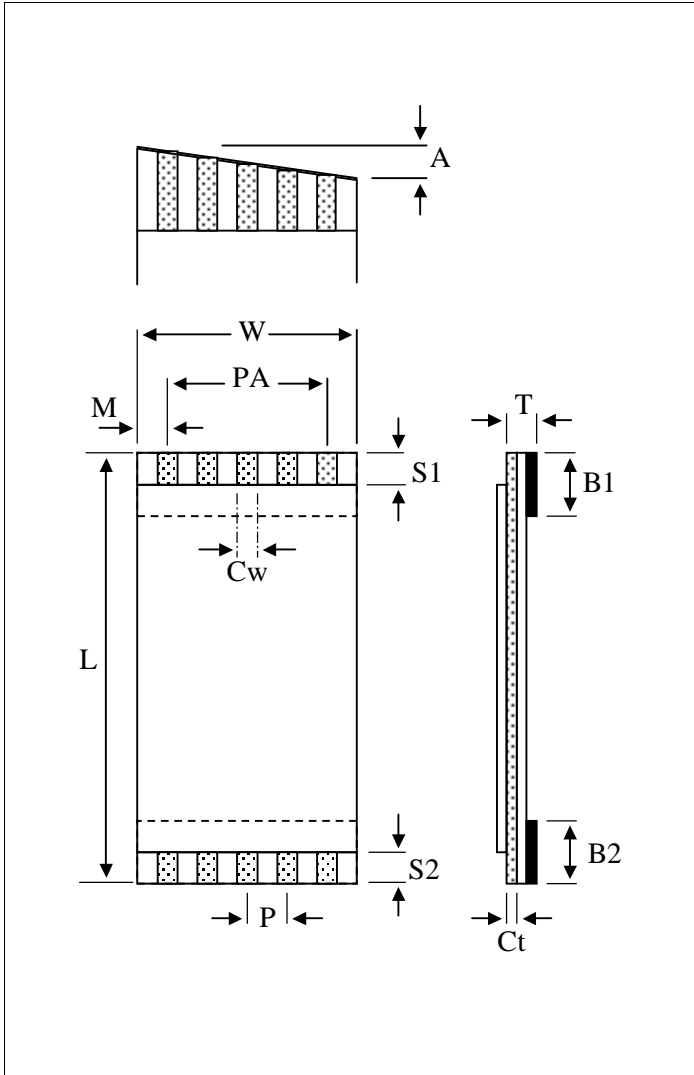

### ► CABLE DIMENSION [unit : mm]

DESCRIPTION	Abbr	Dimension	Tolerance
PITCH	P	0,5	± 0.050
NO. OF CONDUCTOR	N	30	-
CABLE LENGTH	L	110	± 3.00
STRIP LENGTH	S1	4	± 1.0
	S2	4	± 1.0
S/T LENGTH	B1	8	± 2.0
	B2	8	± 2.0
INSERT THICK	T	0,3	± 0.05
WIDTH	W	15,50	± 0.10
SPAN	PA	14,50	± 0.10
MARGIN	M	0,50	± 0.10
CONDUCTOR THICK	Ct	0,05	± 0.01
CONDUCTOR WIDTH	Cw	0,32	± 0.03
LESS THAN	A	0,5	-
PLATED	PL	1µm ↑	

### ◎ REMARK