


NO	件號 PAT. NO	名稱 NAME	材質 MATL	件數 SHT	處理 TREAT	備註 REMARK
1	M-631-PF-R	3 PIN CABLE		1		
2	V-035PX-R	電線 WIRE	UL2464 CORE 24AWG	1		黑色被覆

ELECTRICAL SPECIFICATIONS	
1	Rated current/voltage 3A-125V MAX. 5mA-5V MIN.
2	Operation limits voltage (AC.V.rms)
3	Withstanding voltage (AC.V.rms) 1minute 1500
4	Insulation resistance (MΩ MIN.) at DC 500V 100
5	Contact resistance (mΩ MAX.) at DC 1A 40

智慧財產權 請勿抄襲盜用
APEX CONNECTOR PROPRIETARY
本產品符合 RoHS 指令



參考圖面
REFER DRAWING

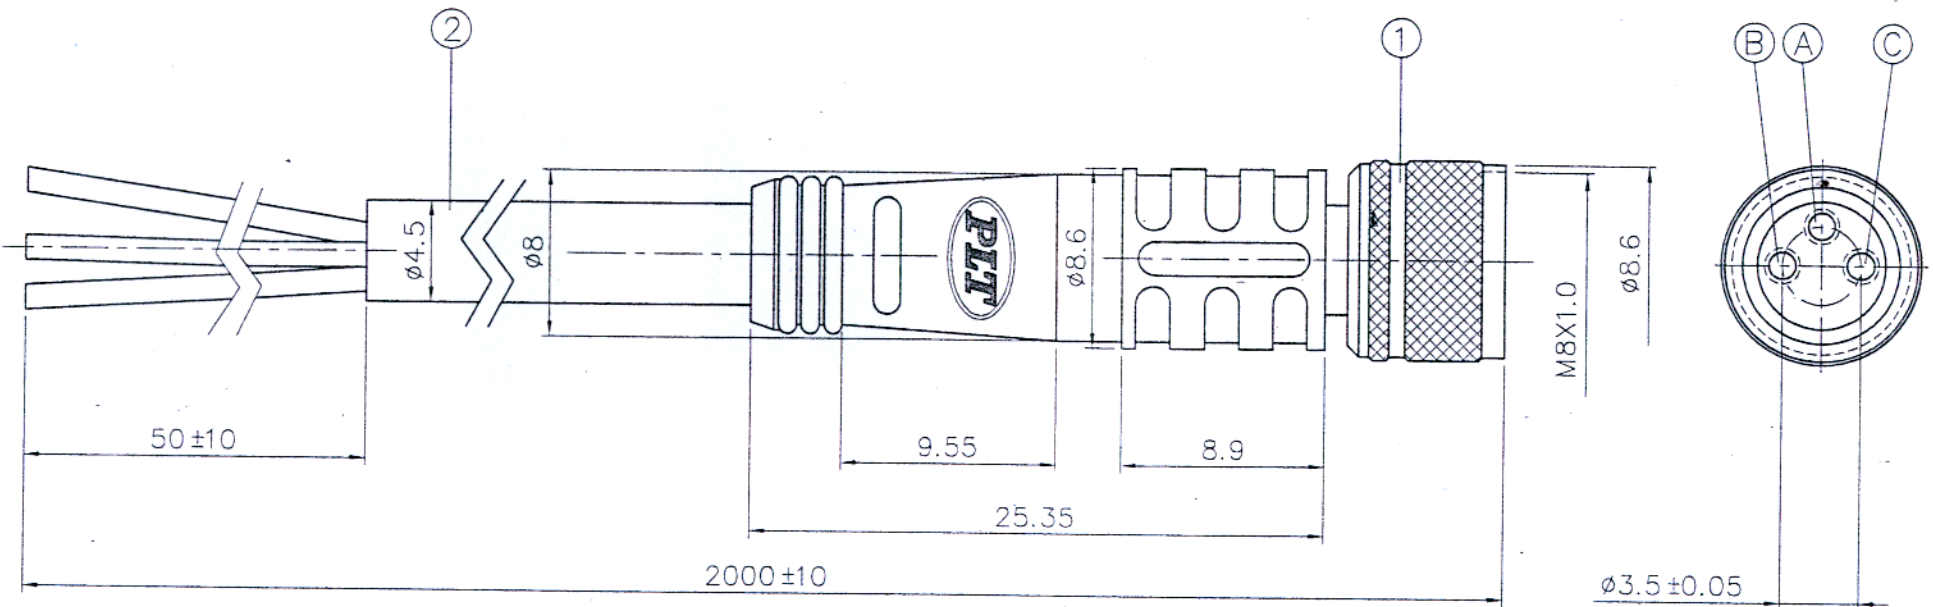

A	BLACK INSULATION	黑色
B	BLUE INSULATION	藍色
C	BROWN INSULATION	棕色

FOR YOUR FORMAL APPROVAL,
PLS CONFIRM BY RETURN FAX
SIGNATURE :



黑色軟質PVC成型

ISO-9001:2000 CERTIFIED MANUFACTURER	▲	
鋁鋼精密科技股份有限公司 APEX PRECISION TECHNOLOGY CORP.	▲	
NO.	變更說明	

機種 MODEL	名稱 NAME	DATE	UNIT	DESIGNER	CHECKED	APPROVE
M-631-PF2-R	3 PIN CABLE ASS'Y	2006.06.26	mm	開發部 2006.06.26 Candy	審核 Tians	核准 陳
		TOLERANCE	SCALE			
		±0.2	3X			