


## ◆ SPECIFICATION

DESCRIPTION

UL2896 - 24N × 65mm \* 1.0p \* (5/5 , 10/10) \* (0,1\*0,65) \* P7

### ► CABLE TYPE (PATTERN : 7 )

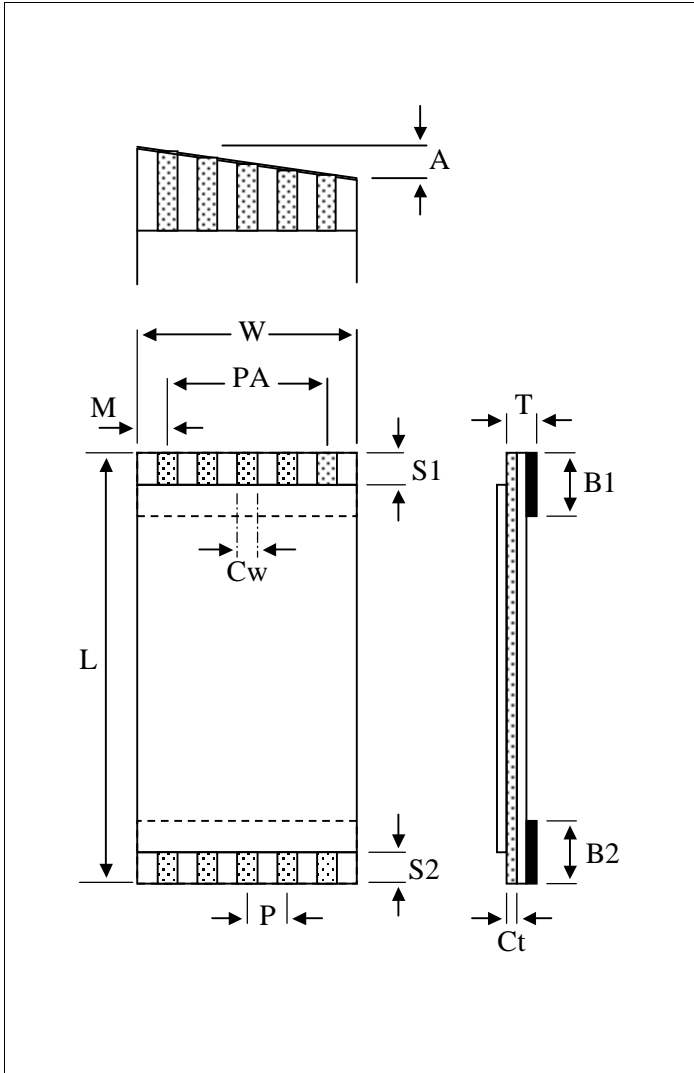

### ► CABLE DIMENSION [unit : mm]

| DESCRIPTION      | Abbr | Dimension | Tolerance |
|------------------|------|-----------|-----------|
| PITCH            | P    | 1.0       | ± 0.10    |
| NO. OF CONDUCTOR | N    | 24        | -         |
| CABLE LENGTH     | L    | 65        | ± 3.00    |
| STRIP LENGTH     | S1   | 5         | ± 1.0     |
|                  | S2   | 5         | ± 1.0     |
| S/T LENGTH       | B1   | 10        | ± 2.0     |
|                  | B2   | 10        | ± 2.0     |
| INSERT THICK     | T    | 0,3       | ± 0.05    |
| WIDTH            | W    | 25,00     | ± 0.15    |
| SPAN             | PA   | 23,00     | ± 0.15    |
| MARGIN           | M    | 1.0       | ± 0.15    |
| CONDUCTOR THICK  | Ct   | 0,10      | ± 0.01    |
| CONDUCTOR WIDTH  | Cw   | 0,65      | ± 0.03    |
| LESS THAN        | A    | 0,5       | -         |
| PLATED           | PL   | 1µm ↑     |           |

### ◎ REMARK