
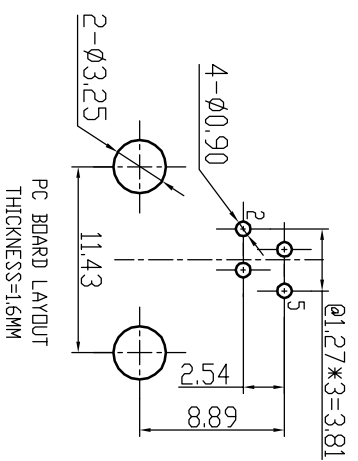
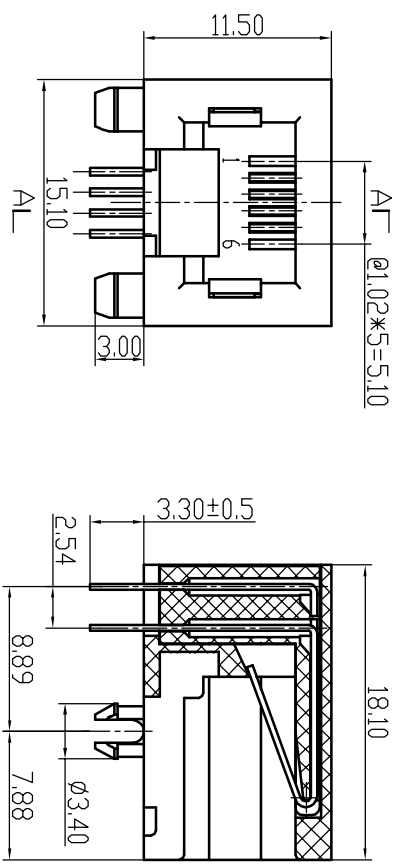


REV.	ECN NO.	DATE
01	ADD P/N	2014.05.23

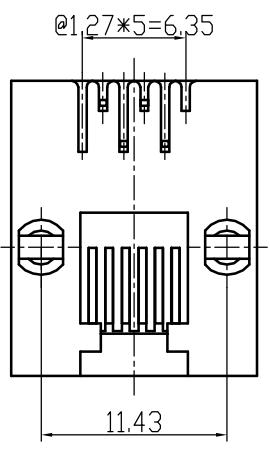

- NOTES:
- ELECTRICAL:
1. VOLTAGE RATING : 125 VAC RMS.
 2. CURRENT RATING : 1.5 AMPS@25°C
 3. CONTACT RESISTANCE : 20 mΩ MAX.
 4. INSULATION RESISTANCE : 1000 MΩ MIN @500VDC.
 5. WITHSTAND VOLTAGE : 1000 VAC RMS, contact to contact or 1500VDC, contact to screen and test panel @0.5mA 50Hz or 60Hz 1 min.

- ENVIRONMENTAL:
1. STORAGE TEMPERATURE : -40°C ~+85°C RELATIVE HUMIDITY<80%
 2. OPERATION TEMPERATURE : -40°C ~+85°C
- MATES WITH MODULAR PLUG CONFORMING TO IEC-60603 & TIA-1096

- MECHANICAL:
1. HOUSING/INSERT MATERIAL : PBT/PA66 UL94V-0.
 2. CONTACT MATERIAL : PHOSPHOR BRONZE T=0.35mm.
 3. CONTACT PLATING : GOLD PLATING OVER NICKEL.
 4. MATING/UMATING FORCE : 30N Max.
 5. RETENTION STRENGTH : 50N FOR 60S±5S.
 6. DURABILITY : 750 CYCLES MIN.

RoHS Compliant



温州意平接插件股份有限公司
WENZHOU YIHUA CONNECTOR CO., LTD

SCALE	UNIT	CUSTOMER:
1:1	mm	
MODEL NO:		

TOLERANCES	Material:
00~15 ± 0.15	SEE_NDTE
15~30 ± 0.20	Finish:
30~ ± 0.25	G/F
ANGLES ±1°	SHEET 1 OF 1

Designed:	Ygq
Checked:	
Approved:	

NAME:	RJ11 5321 6P JK1055 JACK
DWG NO:	E53Q07091903
PART NO:	SEE_NDTE

REV.	01
------	----

P/N	DESCRIPTION	MATERIAL COLOR
10240564A001	RJ11 5321 6P4C(2.345)JK1055 JACK G/F	PBT BLACK