


REV	DESCRIPTION	DATE

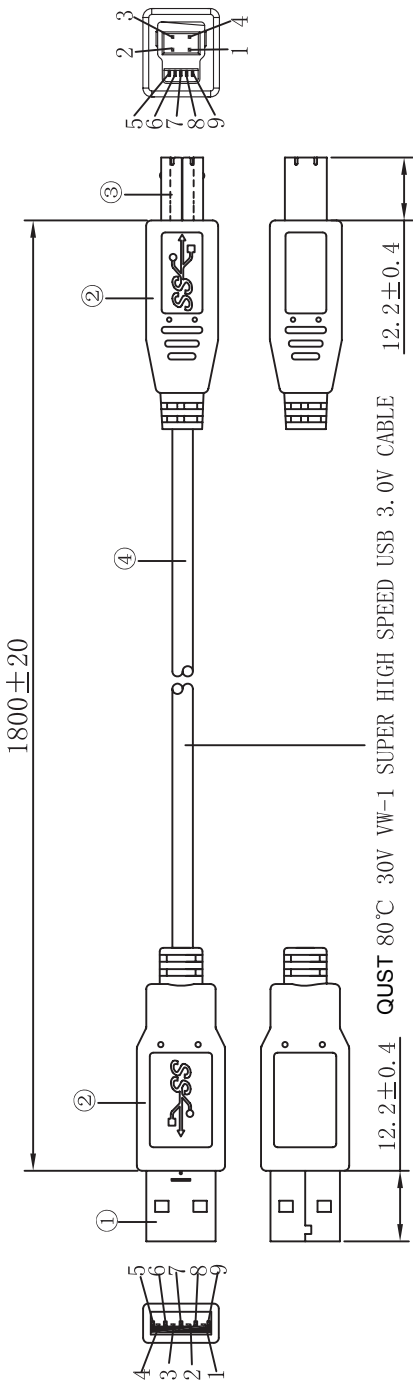

接点图:

<u>A</u>	<u>B</u>
1 --- RED --- 1	2 --- WHIET --- 2
2 --- WHIET --- 2	3 --- GREEN --- 3
3 --- GREEN --- 3	4 --- BLACK --- 4
4 --- BLACK --- 4	5 --- BLUE --- 5
5 --- BLUE --- 5	6 --- YELLOW --- 6
6 --- YELLOW --- 6	7 --- GND --- 7
7 --- GND --- 7	8 --- PURPLE --- 8
8 --- PURPLE --- 8	9 --- ORANGE --- 9
9 --- ORANGE --- 9	G --- DW+BD --- G

Test Conditions:
 1. 100% open & short circuit test;
 2. Insulation Resistance: 2.0ohm (MAX);
 3. Conduction Resistance: 5Mohm (MIN) at 300V DC/0.01S .

QUST		QUST International Ltd	
TITLE	USB3.0 USB AM/USB BM	CUSTOMER	UNIT
PART NO.	C02-0205	CUSTOMER NO.	mm
PRODUCT NO.		REV	DATE
DRAWN BY: xiang	CHECKED BY:	A/0	2013
④	CABLE: 28# 7 0.12TC +DW 7 0.12TC +AL MY+ *2P+28# 7 0.12TC *1P+24# (7/0.20TC)*2C+AL/MY+DW(7/0.10TC)+BD(16/5/0.10)TC] OD:5.5mm VCOME J-字	1800	PAGE: 1 of 1
③	OVER MOLDING: PVC-50P PVC	g	
②	PLUG: USB BM SOLDERING TYPE, NICKEL-PLATED, PBT	SET	
①	PLUG: USB AM SOLDERING TYPE, NICKEL-PLATED, PBT	SET	
No.	MATERIAL DESCRIPTION	UNIT	QTY