


◆ SPECIFICATION

DESCRIPTION	UL2896 - 6N × 180mm * 1.0p * (4/4 , 8/8) * (0,1*0,65) * P7
-------------	------------------------------------------------------------

▶ CABLE TYPE (PATTERN : 7)

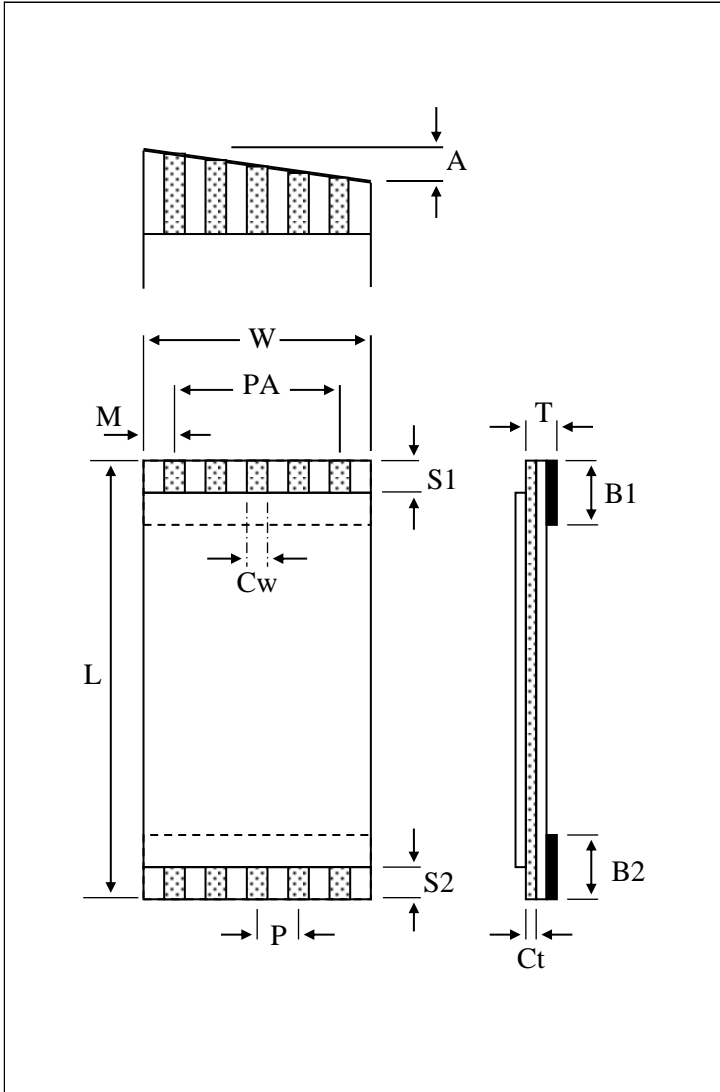

▶ CABLE DIMENSION [unit : mm]

DESCRIPTION	Abbr	Dimension	Tolerance
PITCH	P	1.0	± 0.10
NO. OF CONDUCTOR	N	6	-
CABLE LENGTH	L	180	± 3.00
STRIP LENGTH	S1	4	± 1.0
	S2	4	± 1.0
S/T LENGTH	B1	8	± 2.0
	B2	8	± 2.0
INSERT THICK	T	0,3	± 0.05
WIDTH	W	6,00	± 0.15
SPAN	PA	5,00	± 0.15
MARGIN	M	1.0	± 0.15
CONDUCTOR THICK	Ct	0,10	± 0.01
CONDUCTOR WIDTH	Cw	0,65	± 0.03
LESS THAN	A	0,5	-
PLATED	PL	$1, \mu m \uparrow$	

◎ REMARK

Data input

STYLE	N	TL	P	S1	S2	B1	B2	Ct	Cw	pattern
UL2896	6	180	1,00	4	4	8	8	0,10	0,65	7