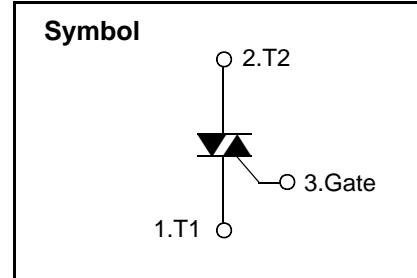


## Features

- ◆ Repetitive Peak Off-State Voltage : 600V
- ◆ R.M.S On-State Current (  $I_{T(RMS)} = 12 \text{ A}$  )
- ◆ High Commutation dv/dt
- ◆ Non-isolated Type



## General Description

This device is suitable for AC switching application, phase control application such as fan speed and temperature modulation control, lighting control and static switching relay.

## Absolute Maximum Ratings ( $T_J = 25^\circ\text{C}$ unless otherwise specified )

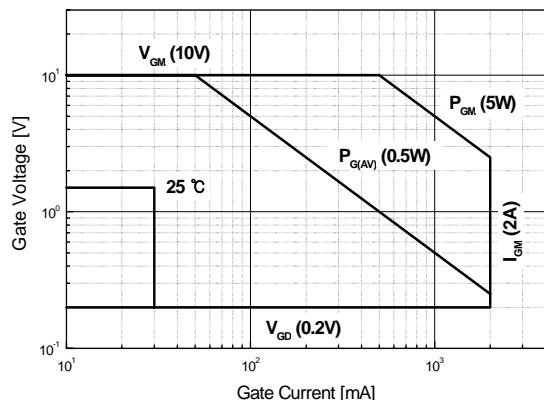
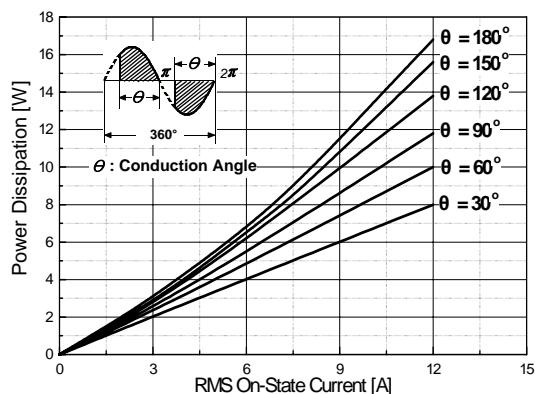
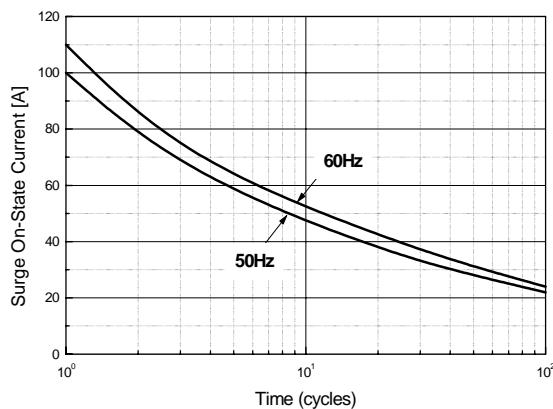
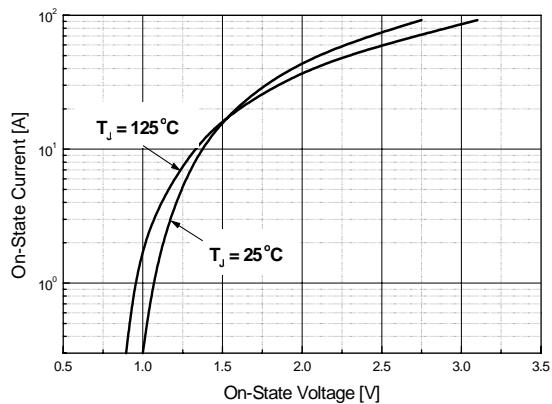
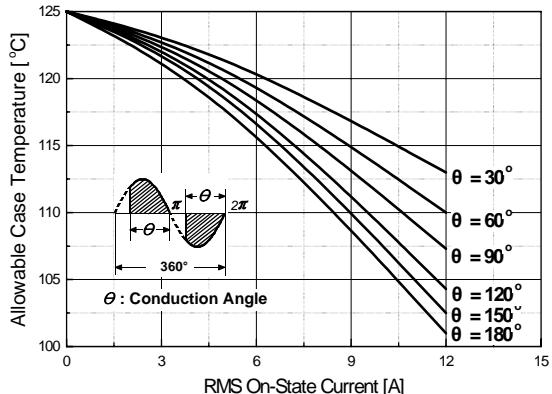
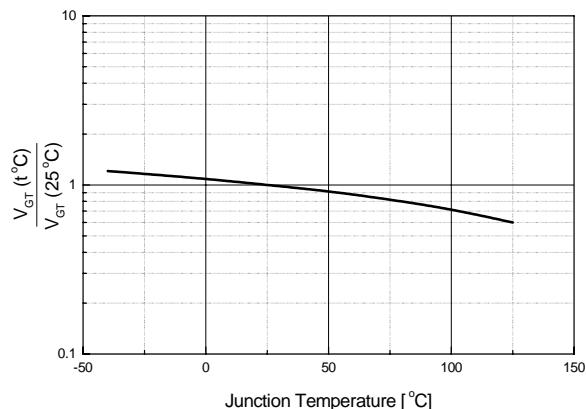
Symbol	Parameter	Condition	Ratings	Units
$V_{DRM}$	Repetitive Peak Off-State Voltage		600	V
$I_{T(RMS)}$	R.M.S On-State Current	$T_C = 101^\circ\text{C}$	12	A
$I_{TSM}$	Surge On-State Current	One Cycle, 50Hz/60Hz, Peak, Non-Repetitive	100/110	A
$I^2t$	$I^2t$ for fusing	$t = 10\text{ms}$	50	$\text{A}^2\text{s}$
$P_{GM}$	Peak Gate Power Dissipation		5.0	W
$P_{G(AV)}$	Average Gate Power Dissipation	Over any 20ms period	0.5	W
$I_{GM}$	Peak Gate Current		2.0	A
$V_{GM}$	Peak Gate Voltage		10	V
$T_J$	Operating Junction Temperature		- 40 ~ 125	$^\circ\text{C}$
$T_{STG}$	Storage Temperature		- 40 ~ 150	$^\circ\text{C}$
	Mass		2.0	g



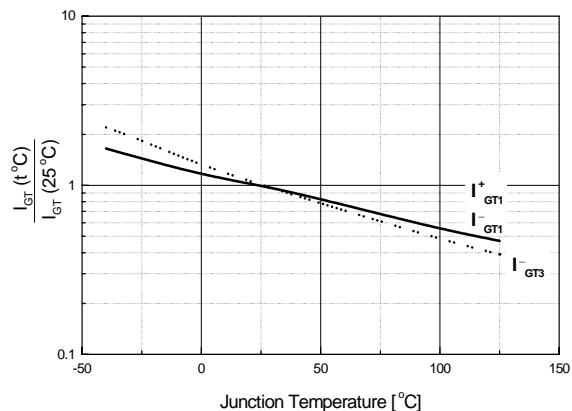
BT138-600  
*Bi-Directional Triac*

## Electrical Characteristics

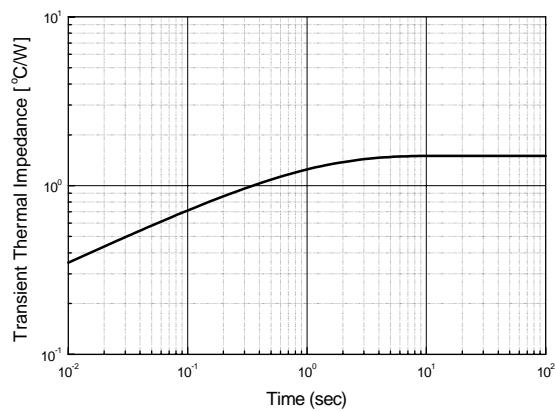
Symbol	Items	Conditions	Ratings			Unit
			Min.	Typ.	Max.	
$I_{DRM}$	Repetitive Peak Off-State Current	$V_D = V_{DRM}$ , Single Phase, Half Wave $T_J = 125^\circ C$	—	—	2.0	mA
$V_{TM}$	Peak On-State Voltage	$I_T = 15 A$ , Inst. Measurement	—	—	1.65	V
$I^+_{GT1}$	I	Gate Trigger Current	—	—	25	mA
$I^-_{GT1}$	II		—	—	25	
$I^-_{GT3}$	III		—	—	25	
$V^+_{GT1}$	I	Gate Trigger Voltage	—	—	1.5	V
$V^-_{GT1}$	II		—	—	1.5	
$V^-_{GT3}$	III		—	—	1.5	
$V_{GD}$	Non-Trigger Gate Voltage	$T_J = 125^\circ C$ , $V_D = 1/2 V_{DRM}$	0.2	—	—	V
$(dv/dt)_c$	Critical Rate of Rise Off-State Voltage at Commutation	$T_J = 125^\circ C$ , $[di/dt]_c = -4.0 A/ms$ , $V_D=2/3 V_{DRM}$	10	—	—	V/ $\mu$ s
$I_H$	Holding Current		—	15	—	mA
$R_{th(j-c)}$	Thermal Impedance	Junction to case	—	—	1.5	°C/W

**Fig 1. Gate Characteristics**

**Fig 3. On State Current vs. Maximum Power Dissipation**

**Fig 5. Surge On-State Current Rating (Non-Repetitive)**

**Fig 2. On-State Voltage**

**Fig 4. On State Current vs. Allowable Case Temperature**

**Fig 6. Gate Trigger Voltage vs. Junction Temperature**


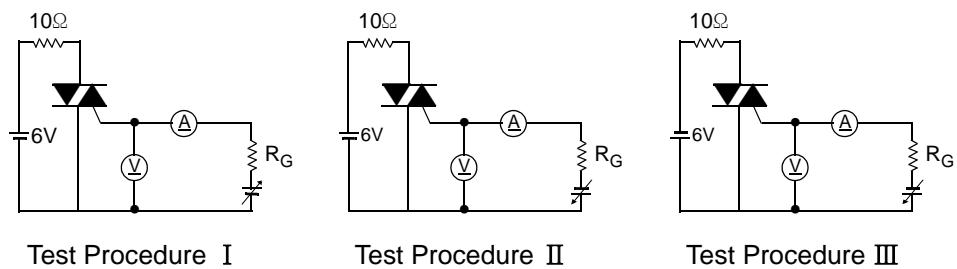
**Fig 7. Gate Trigger Current vs.  
Junction Temperature**



**Fig 8. Transient Thermal Impedance**



**Fig 9. Gate Trigger Characteristics Test Circuit**



## TO-220外形尺寸图：

