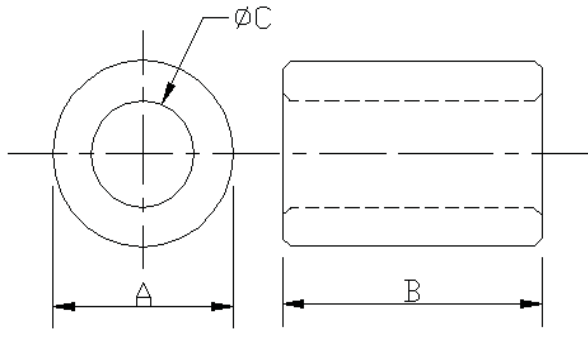
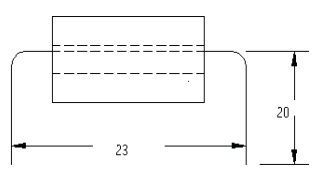


SPECIFICATION FOR APPROVAL

CUSTOMER:	慶陸	CUST.P/N: LFRH000100
ORDERING CODE:		
(1) SHAPE :  <p style="text-align: center;">C角</p>	A	4.0±0.2 mm
	B	10.0±0.4 mm
	C	2.0±0.15 mm
	D	mm
	E	mm
	F	mm
	G	mm
(2)ELECTRICAL REQUIREMENTS: $Z_1 = 37^{-0}$ OHM AT 25 MHz $Z_2 = 63^{-0}$ OHM AT 100 MHz	(3) TEST CONDITIONS: 1 IMPEDANCE ANALYZERHP4191A TEST FIXTURE: HP16092A 2.WIRE: $\Phi 0.65$ T.C.W*63mm 1/2Ts 3.DRAWING: 	
(4)PACKING <input checked="" type="checkbox"/> IN BULK <input type="checkbox"/> VACUUM <input type="checkbox"/> INSERTION 2000 PCS/BAG* 4 BAGS/INNER BOX 4 BOXES/CARTON = 32000 PCS PCS/PLATE* PLATES/CARTON= PCS PCS/TRAY* TRAYS/CARTON= PCS	(5) APPEARANCE (1)AREA OF BREAK : <2 mm ² (2)SUM OF BREAKING AREA <3 mm ² (3)DEPTH OF BREAK : <1 mm	
(6)REMARK:	Approved by	
	Checked by	
	Drawn by	2009/3/16
	DWG.NO.	