


# YH-SMT-07

REV.	ECN NO.	DATE

- NOTE:
- ELECTRICAL:
    - VOLTAGE RATING: 125 VAC RMS;
    - CURRENT RATING: 15 AMP;
    - CONTACT RESISTANCE: 20 MILLIOHMS Max;
    - INSULATION RESISTANCE: 1000 MEGOHMS Min @500 VDC;
    - DIELECTRIC STRENGTH: 1000 VAC RMS 50 or 60Hz 1 Minute;
  - MECHANICAL:
    - HOUSING: PBT, UL94V-0, BLACK;
    - TERMINALS: T0.36xW0.46 PHOSPHOR BRONZE PLATED 3u" Au;
    - DURABILITY: 750 CYCLES Min.
- ★Critical dimension.

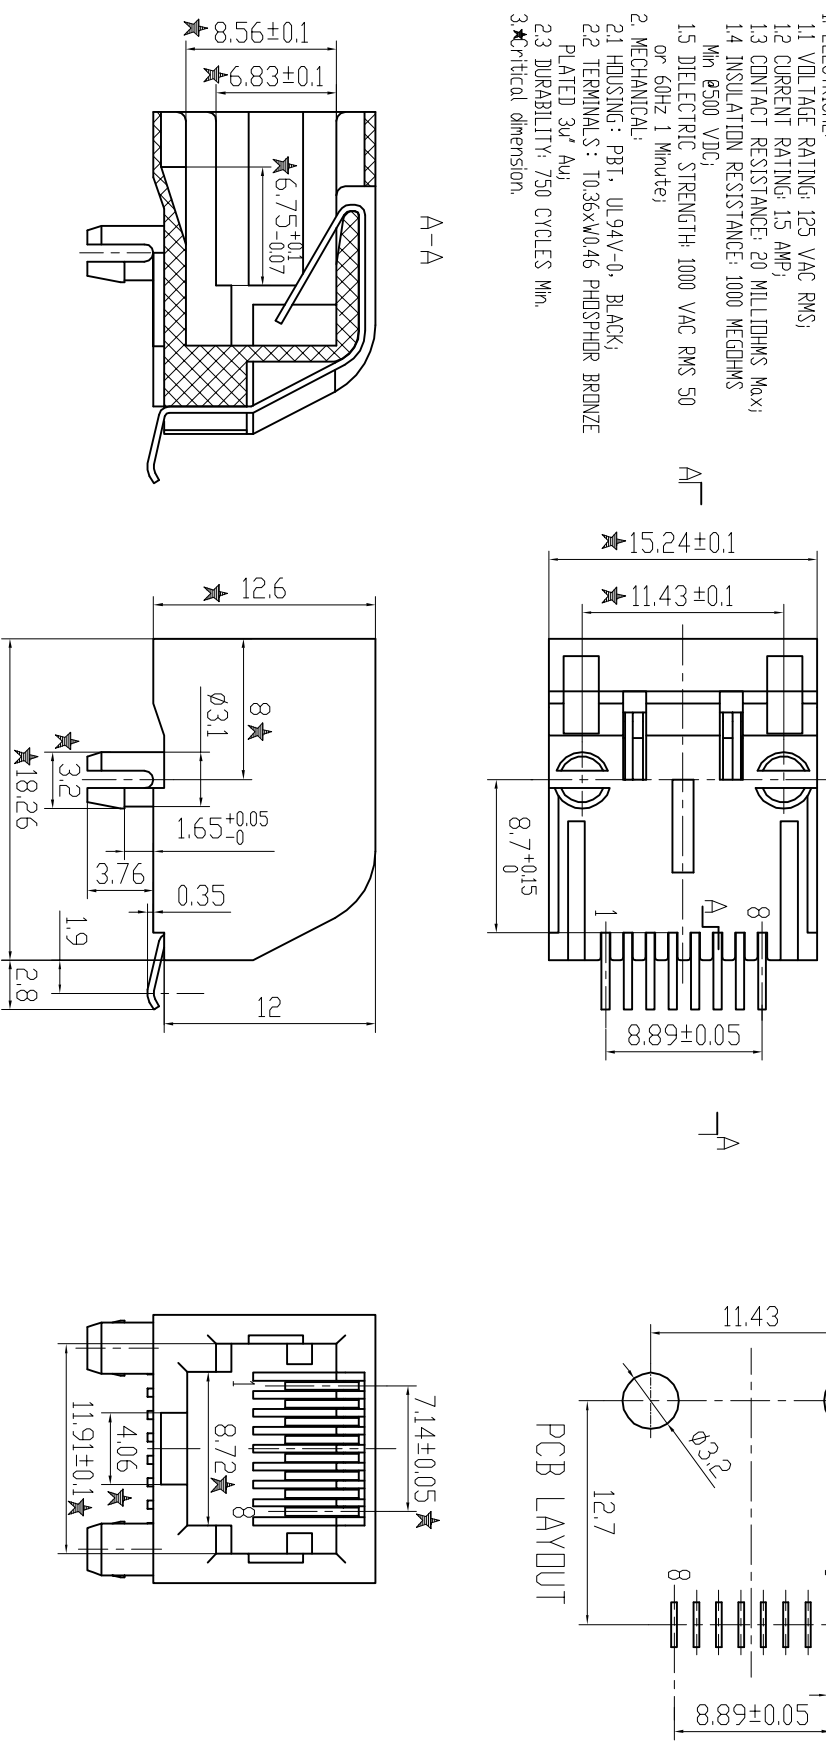

ROHS Compliant



**惠华通讯插件有限公司**  
YIHUA COMMUNICATED CONNECTOR CO., LTD.

TOLERANCES

0-15H±0.15,  
15-30H±0.2,  
30-40Z±0.25  
ANGLE:H°

MATERIAL: SEE NOTE

Designed:

NAME: 5722 8P 无耳 SMT

FINISH: SEE NOTE

Checked:

DWG NO.: C07081306

SHEET 1 OF 1

Approved:

PART NO.: B572N-8803-M007



SIZE A4

SCALE 2.5:1

UNIT mm

CUSTOMER: MODEL NO.:

REV 00