

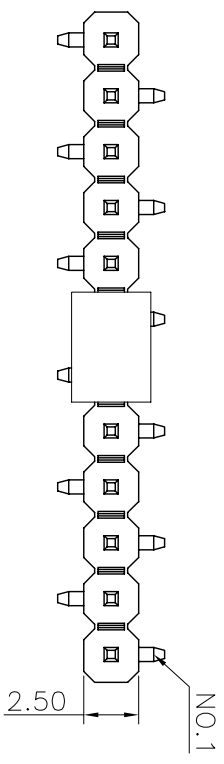


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01	NEW	INITIAL RELEASE.	2013.06.08	李芳忠

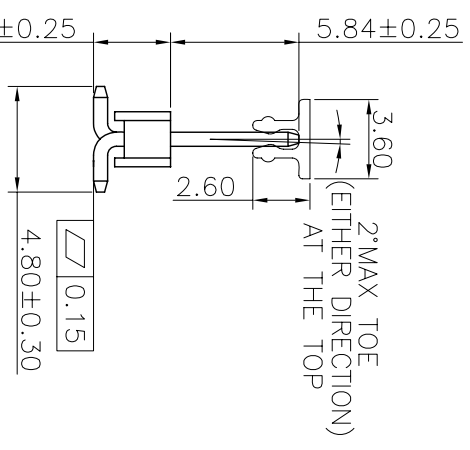

2.54 X No. of Positions+0.38

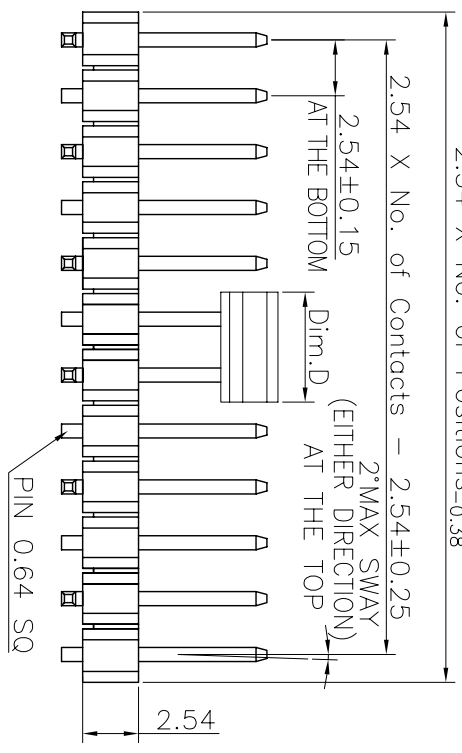

Specifications
 Current Rating: 3Amp
 Insulation Resistance: 1000MΩ/Min.
 Dielectric Withstanding Voltage: 600VAC
 Contact Resistance: 20mΩ/Max.
 Operating Temperature: -40°C to +105°C
Materials
 Contact Material: Brass
 Insulator Material: High Temperature Thermoplastic, UL 94V-0 Nylon 6T(Halogen Free) or the equivalent material
 All materials must meet Greencoan requirement for environment protection.

Ordering Information

G PHC101 - XX XX A 047 R 1 B X

No. of Pins per Row: 02~40


Standard Pating
 02=Gold Flash
 Selective Pating
 01=Tin
 05=Gold Flash/Tin

Color: 1=Black

Standard Packing
 C=Tube
 Selective Packing
 A=Box
 E=Cap+Tube
 F=Cap+Tape&Reel

Dim.D	NOTE
5.00mm	02Pins
6.50mm	03~40Pins

Recommended P.C.Board
 Layout
 (Tolerance: ±0.05)

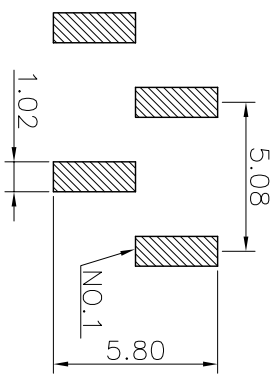

格菱股份有限公司 Greencoan Corporation				GENERAL TOLERANCE		DESIGN: 李芳忠 CHECKED: 劉北平 AUDITED: APPROVED:		DWG. NO. GPHC101-CA47RB PART NO. GPHC101-XXXX A047R1BX		TITLE: 2.54 PIN HEADER SINGLE ROW SMT TYPE CONNECTOR	
REV. 01	UNIT. mm	SCALE. 3:1	PAGE. 1/1	X. ±5.0°	X. ±0.30	DATE: 2013.06.08					
				.X. ±3.0°	.X. ±0.25	DATE: 2013.06.08					
				.XX. ±2.0°	.XX. ±0.15	DATE:					
				.XXX. ±1.0°	.XXX. ±0.10	DATE:					