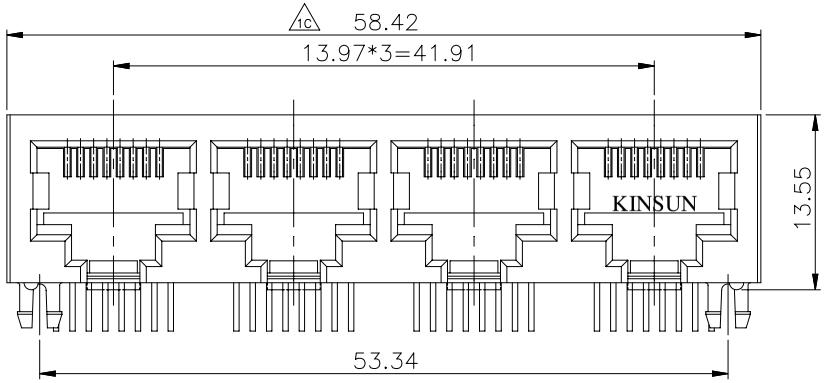

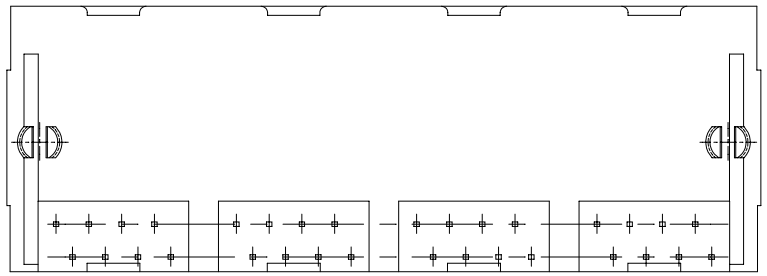

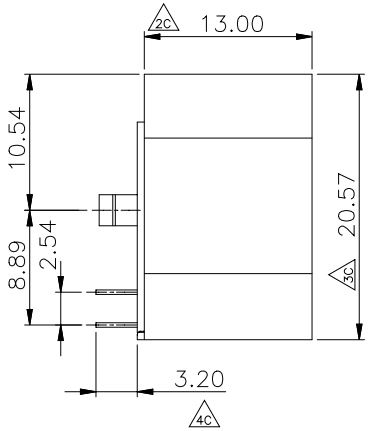

MATERIALS:
PLASTIC HOUSING: ENGINEERING THERMOPLASTIC
FLAMMABILITY RATING UL 94V-0.
CONTACTS: 0.35mm THICKNESS PHOSPHOR BRONZE
PLATING: GOLD PLATING OVER NICKEL IN CONTACT.
TIN PLATING OVER NICKEL IN SOLDER AREA.

PCB LAYOUT/TOP VIEW

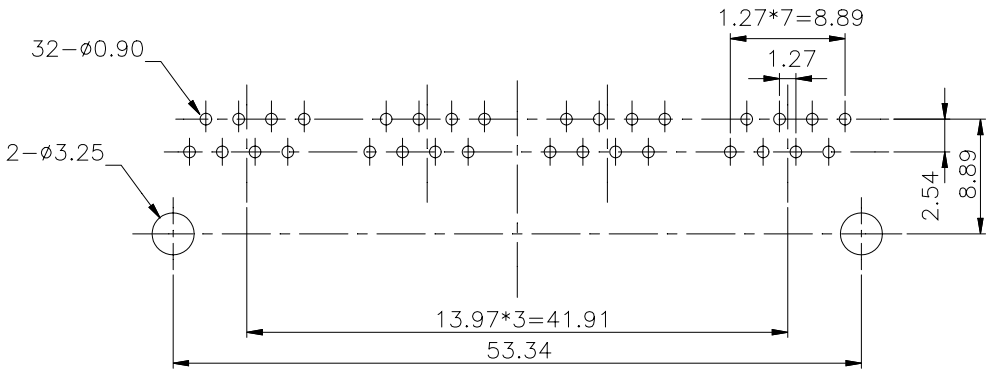

6u" P/N 3012445500
15u" P/N 3012445900
30u" P/N 3012446400
50u" P/N 3012446900

※凡標註 △C記號者, 為品管檢驗之尺寸

設計 DR. LILY 88-12-27	核准 APPD. Jerry 92-12-23	容許公差 TOLERANCE	品名 ARTICLE: 1*4PORTS PCB JACK (8P8C鍍)
版本說明 REVISION NOTE		.XXX ±0.10 .XX ±0.25 .X ±0.38 X ±0.50 ANG ±3°	圖號 DWG NO.: 3012445500
KINSUN 慶陞			單位 UNIT: mm / 比例 SCALE: 2.5/1 / 張數 SHEET: 1/1 / 版本 REV.: A