

STRADA-2X2-A-T

Short IESNA Type II beam for narrow roads or high poles with extremely low glare


TECHNICAL SPECIFICATIONS:

Dimensions	50.0 mm
Height	7.3 mm
Fastening	glue, pin, screw
Colour	clear
Box size	480 x 280 x 300 mm
Box weight	6.8 kg
Quantity in Box	800 pcs
ROHS compliant	yes ⓘ



MATERIAL SPECIFICATIONS:


Component	Type	Material	Colour
STRADA-2X2-A-T	Multi-lens	PMMA	clear

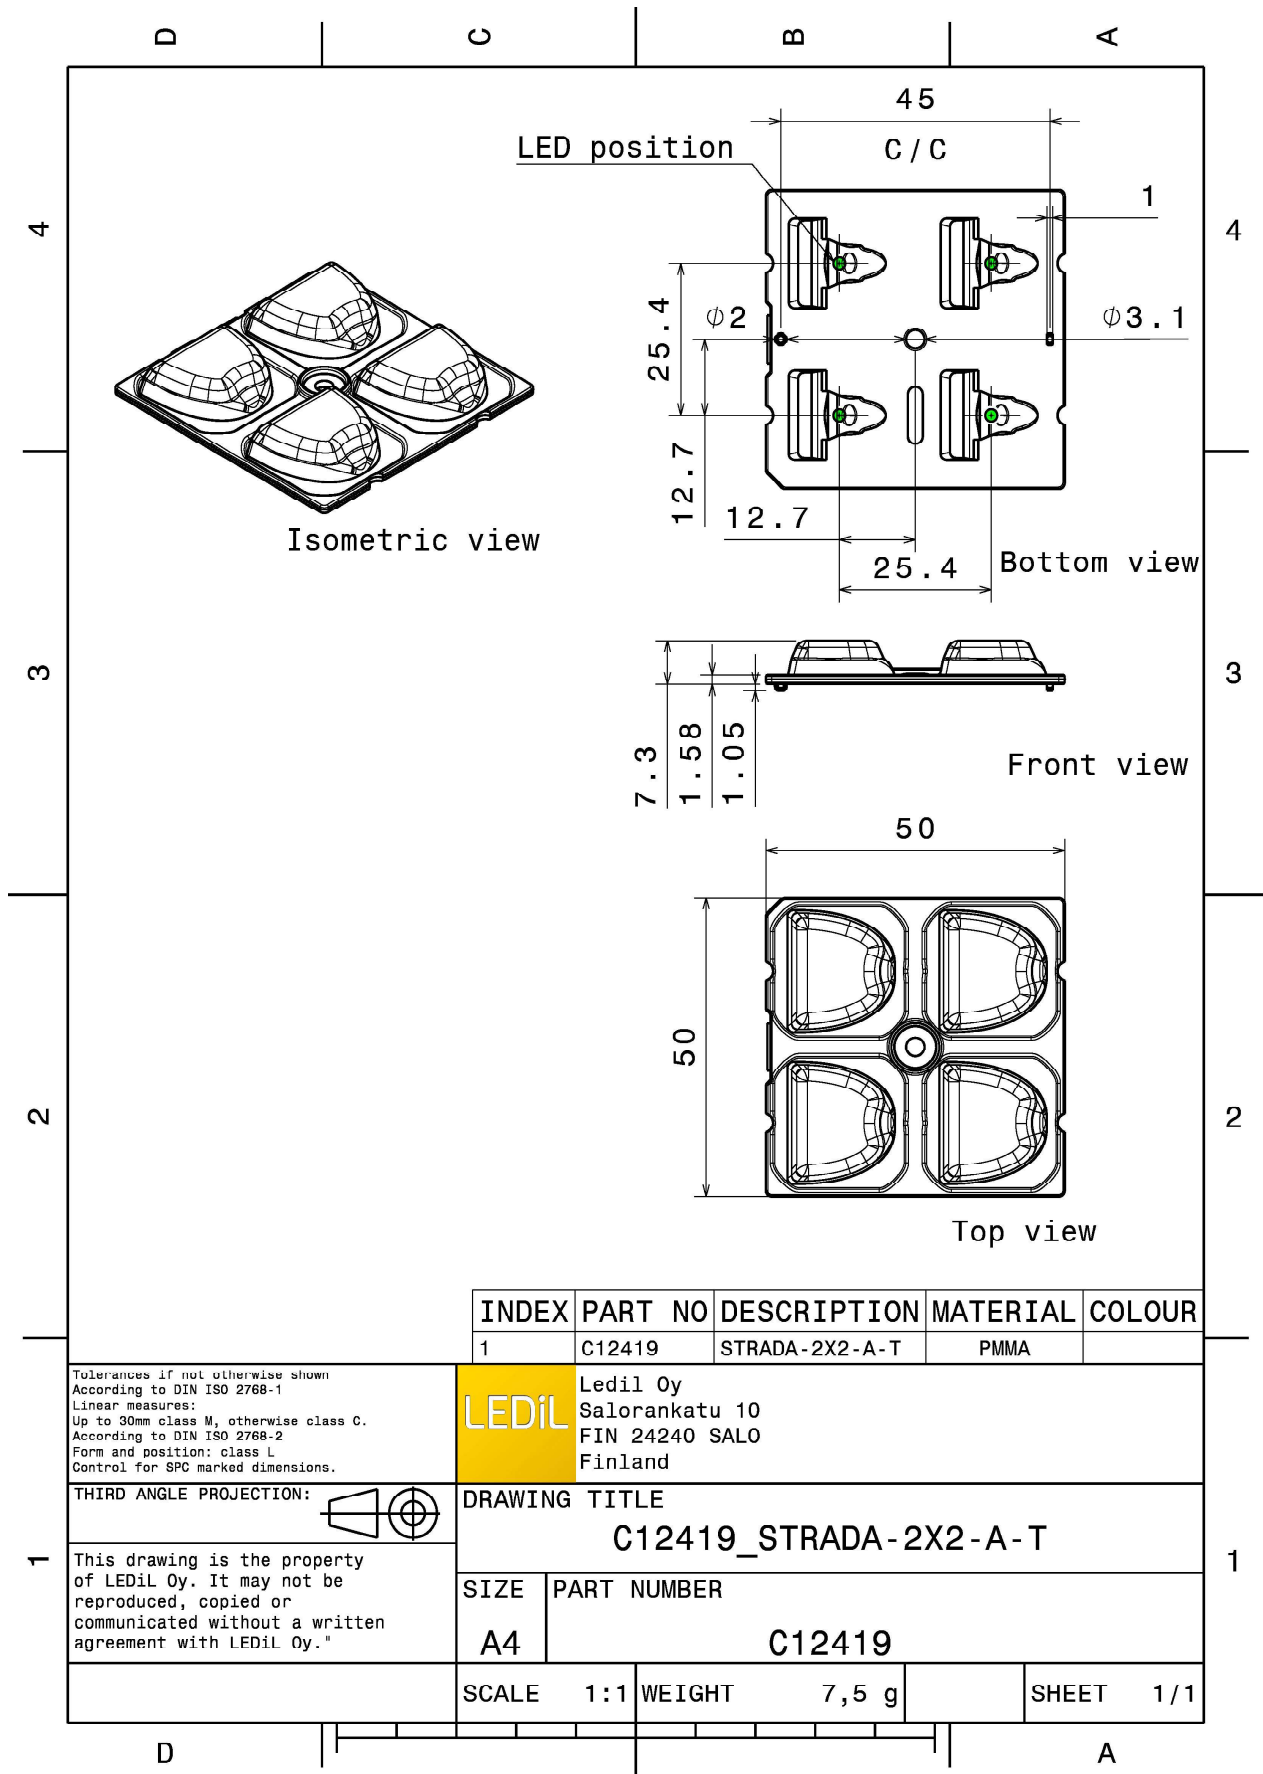

PHOTOMETRIC DATA (MEASURED):


CREE 

LED XM-L
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.620 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

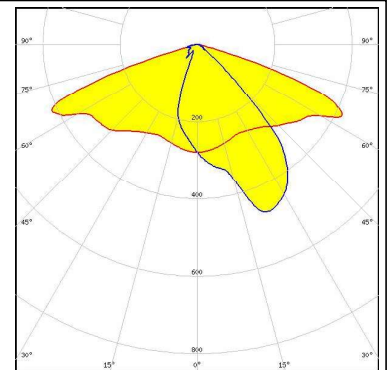


CREE 

LED XM-L2
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.700 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

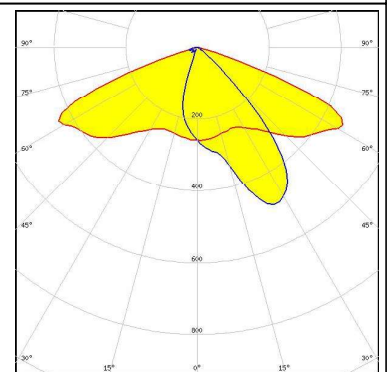


CREE 

LED XP-G
 FWHM Asymmetric
 Efficiency 93 %
 Peak intensity 0.450 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:



CREE 


LED XP-G2
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.900 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

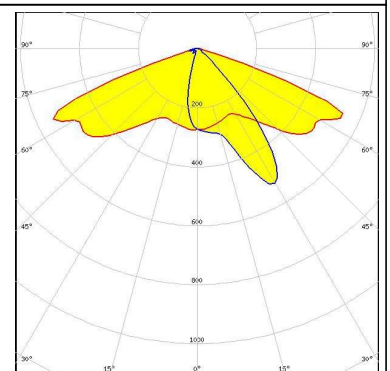

PHOTOMETRIC DATA (MEASURED):


CREE

LED XP-L HD
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.670 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

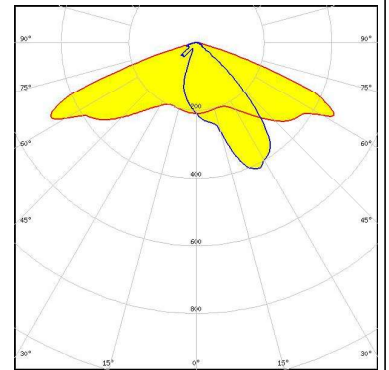


CREE

LED XP-L HI
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.890 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

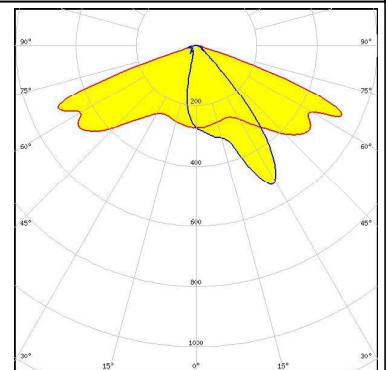

CREE

LED XP-L2
 FWHM Asymmetric
 Efficiency 94 %
 Peak intensity 0.610 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

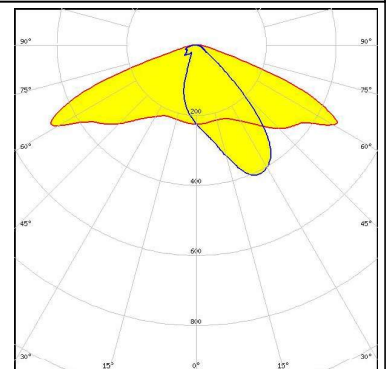

CREE

LED XT-E
 FWHM Asymmetric
 Efficiency 93 %
 Peak intensity 0.470 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:

