


VAM600

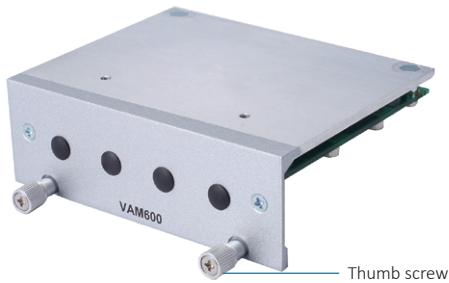

Thumb screw

Specifications

I/O Outlet	4 x Antenna opening	
Expansion interface	2 x Full size Rev. 1.2 PCI Express Mini Card slot <ul style="list-style-type: none"> • 1 x USB/PCIe with SIM socket • 1 x USB with SIM socket 	
Operating Temperature	-40°C to +70°C (-40°F to +158°F) with tBOX500 series & Wide operating temperature peripheral -25°C to +70°C (-13°F to +158°F) with tBOX300 series & Wide operating temperature peripheral	
Certifications	LVD, FCC and EN 50155 certified; CE compliant	
EMC	CE/FCC	EN 61000-6-4 (Class A), EN 61000-6-2 FCC part 15 B (Class A)
	EN 50155	EN 50121-3-2, IEC 62236-3-2
LVD	EN 60950-1	
Vibration	3Grms with tBOX300/tBOX500 series (5 to 500Hz, X/Y/Z direction; random, operating)	
	EN 50155	EN 61373 category 1 class B
Shock	EN 50155	Half-sine pulse, 5g, 30ms (longitudinal direction), 3g, 30ms (vertical/transverse direction)

*For more information of certification/EMC/Vibration/Shock as above, please contact Axiomtek 's regional distributor

Ordering Information

VAM600 (P/N: E277600100)	Value-added module with 4 antenna opening and 2 Full size Rev. 1.2 PCI Express Mini Card slot and to be used with tBOX300/500 series
-----------------------------	--